


Data sheet | Item number: 2857-569


Single-Phase Power Signal Conditioner; Current and voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC



<https://www.wago.com/2857-569>

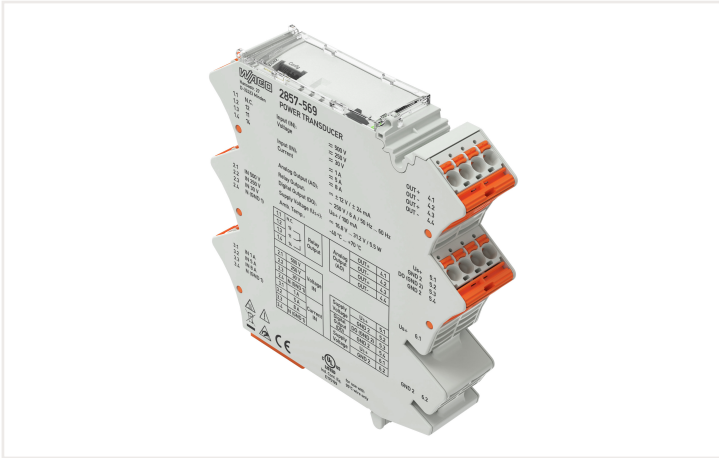

1.1	N.C.		Relay Output	Analog Output (AO)	OUT+	4.1
1.2	12				OUT-	4.2
1.3	11				OUT+	4.3
1.4	14				OUT-	4.4
2.1	500 V	Voltage IN	Supply Voltage	U _s +	5.1	
2.2	250 V			GND 2	5.2	
2.3	30 V			Digital Output (DO)	DO (GND 2)	5.3
2.4	N (GND 1)				GND 2	5.4
3.1	1 A	Current IN	Supply Voltage	U _s +	6.1	
3.2	5 A			GND 2	6.2	
3.3	8 A					
3.4	N (GND 1)					

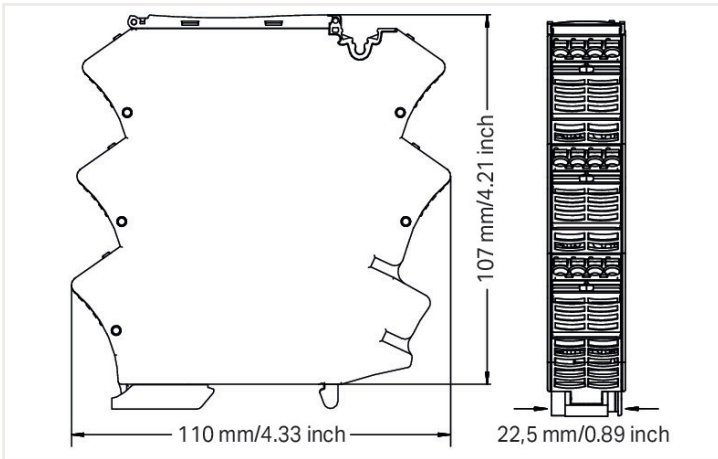

Dimensions in mm

Short description:

WAGO's 1-phase power measurement module monitors and reports signal states with up to two switching thresholds. The sensor and status information that is collected is also converted to a standard analog signal. Current, voltage, effective power, apparent power or reactive power can be selected as the measured variable.

Additionally, both frequency and phase angle are displayed.

Features:

- A relay with changeover contact reacts to configured measurement range limits (on/off switching delay and threshold value switch function can be configured with up to two threshold values).
- Adjustable software filter
- Simulation of input/output response via WAGO Interface Configuration Display
- Analog unipolar/bipolar signals (current/voltage) at output
- Additional digital signal output for configured measurement range limits
- The digital output can be configured as a frequency generator or pulse output (S0 interface).

Notes

Note

- This product is supplied with 24 VDC, which can be commoned using lateral push-in type jumper bars: (6.1) U_S+ (BR) and (6.2) GND 2 (BR). With this variant, it is necessary to ensure that the maximum permissible total current of 6 A is not exceeded.
- Additional setting options via WAGO Interface Configuration Software or WAGO Configuration Display

Technical data

Configuration

Configuration options	WAGO Interface Configuration Software WAGO Configuration Display
-----------------------	---

Input

Input signal type	Voltage Current
Input signal (voltage)	AC/DC 500 V (IN 2.1; per EN 61010-1); AC/DC 300 V (IN 2.1; per UL 61010-1); AC/DC 250 V (IN 2.2); 30 V AC/DC (IN 2.3)
Input signal (current)	AC/DC 1 A (IN 3.1); AC/DC 5 A (IN 3.2); 8 A AC/DC (IN 3.3)
Frequency range	15 ... 400 Hz
Input current (max.)	$1.2 \times I_N$ ($\leq 60^\circ\text{C}$); $1 \times I_N$ (60 ... 70 °C)
Input voltage (max.)	$1.2 \times U_N$
Response threshold (voltage)	500 mVAC / 600 mVDC (IN 2.1) 50 mVAC / 500 mVDC (IN 2.2) 20 mVAC / 100 mVDC (IN 2.3)
Response threshold (current)	1.5 mAAC / 7.5 mADC (IN 3.1) 3 mAAC / 10 mADC (IN 3.2) 7.5 mAAC / 12 mADC (IN 3.3)
Resolution (voltage)	50 mV (IN 2.1) 30 mV (IN 2.2) 5 mV (IN 2.3)
Resolution (current)	1 mA (for all measurement ranges)

Output – analog

Output signal type	Current Voltage
Output signal (voltage)	± 12 V (SELV)
Output signal (current)	± 24 mA (SELV)
Load impedance (voltage output)	≥ 2 k Ω
Load impedance (current output)	≤ 600 Ω

Output – digital

Switching voltage (DO) max.	Supply voltage (applied): -0.3 V
Number of switching thresholds (DO)	2 (max.)
Configurable rise/fall delay time (DO)	0 ... 60 s (via software)
Configurable functions (DO)	Disabled U _S /GND switching Threshold value switch Frequency generator Pulse output (S0 interface)
Setting range (frequency generator)	0.3 ... 100 Hz
Setting range (pulse output)	1000 ... 1 pulses/kW(h)

Output – relay

Number of changeover/switchover contacts	1
Switching voltage (max.)	AC 250 V
Number of switching thresholds (relay)	1 or 2 (adjustable)
Configurable rise/fall delay time (relay)	0 ... 60 s (via software)

Signal processing

Measurement method	True RMS measurement (TRMS)
Measured variables (calculated)	Active power Apparent power Reactive power Mains frequency Phase angle
Limit frequency	2 kHz
Software filter (adjustable)	Filter level: 1 ... 30
Step response (max.)	350 ms (for default settings)

Measurement error

Transmission error (max.)	≤ 0.5 % for current and voltage (of the full scale value)
---------------------------	---

Supply

Power supply type	24 VDC
Nominal supply voltage U_S	DC 24 V (SELV)
Supply voltage range	±30 %
Current consumption at nominal supply voltage	≤ 70 mA (+ I_{D0})

Safety and protection

Rated voltage	600 V; 300 V (UL)
Measurement category per EN/UL 61010-2-030	CAT III (input)
Note on insulation parameters	The service interface is located on the analog output potential.
Protection type	IP20

Test voltage

Test voltage (input IN 2.1/relay output; per EN 61010-1)	5.4 kVAC; 50 Hz; 5 s 3.6 kVAC; 50 Hz; 1 min
Test voltage (input IN 2.1/relay output; per UL 61010-1)	3.51 kVAC; 60 Hz; 1 min
Test voltage (input/supply and analog output/relay output)	3.51 kVAC; 50 ... 60 Hz; 1 min
Test voltage (supply/analog output)	3.6 kVAC; 50 ... 60 Hz; 1 min

Insulation parameters(UL)

Overvoltage category	III
Pollution degree	2
Insulation type (input/supply and analog output/relay output)	Reinforced insulation (safe isolation)

Insulation parameters

Overvoltage category	III
Pollution degree	2
Insulation type (input IN 2.1/relay output)	Reinforced insulation (safe isolation)
Insulation type (input/supply and analog output/relay output)	Double insulation (impedance and basic insulation) Requirement: The N (GND 1) input is dangerous when active!

Connection data

Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0
Solid conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	22.5 mm / 0.886 inches
Height	110 mm / 4.331 inches
Depth from upper-edge of DIN-rail	107 mm / 4.213 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material Data

Fire load	1.796 MJ
Weight	149 g

Environmental requirements

Ambient temperature (operation at U_N)	-40 ... 70 °C
Surrounding air temperature (storage)	-40 ... +85 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 25 \text{ K})$
Temperature range of connection cable (UL)	95 °C
Relative humidity	5 ... 85 % (non-condensing)
Operating altitude (max.)	2000 m

Standards and specifications

Conformity marking	CE
EMC immunity to interference	EN 61000-6-2; EN 61326-2-3
EMC emission of interference	EN 61000-6-3; EN 61326-2-3
Standards/specifications	EN 61010-1 UL 61010-1 UL 61010-2-201

Commercial data

ETIM 8.0	EC002476
ETIM 7.0	EC002476
PU (SPU)	1 Stück
Packaging type	Bag
Country of origin	DE
GTIN	4055143907323
Customs tariff number	85437090300

Approvals and certificates

General approvals



Approval	Standard	Certificate name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC_Certificate_RU_C- DE.AM02.B.00115_19
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011	EAC RU C-DE.AM02. B.00122/19
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	E175199

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2857-569



Documentation

Instruction Leaflet

Single-Phase Power Signal Conditioner; Current and voltage input signal

V 2.0.0
30.09.2020

pdf
3007.72 KB



1 Compatible products

1.1 Optional accessories

1.1.1 Cables and connectors

1.1.1.1 Communication cable



Item no.: 750-923

Configuration cable; USB connector; Length: 2.5 m

Item no.: 750-923/000-001

Configuration cable; USB connector; Length: 5 m

1.1.2 Communication

1.1.2.1 Configuration display



Item no.: 2857-900

Configuration display

1.1.3 Installation

1.1.3.1 Mounting accessories



Item no.: 249-117

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Item no.: 249-197

Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Item no.: 249-116

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.4 Jumper

1.1.4.1 Jumper



Item no.: 281-482

Jumper; 2-way; insulated; gray



Item no.: 859-402/000-006

Jumper; for jumper slot; 2-way; insulated; blue



Item no.: 859-402

Jumper; for jumper slot; 2-way; insulated; light gray



Item no.: 859-402/000-005

Jumper; for jumper slot; 2-way; insulated; red



Item no.: 859-402/000-029

Jumper; for jumper slot; 2-way; insulated; yellow

1.1.5 Marking

1.1.5.1 Marker



Item no.: 2009-141

Micro-WSB-Inline; 2000 pieces on roll; plain; snap-on type; white



Item no.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item no.: 793-502

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item no.: 793-566

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



Item no.: 793-503

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item no.: 793-504

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item no.: 793-505

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



Item no.: 793-506

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item no.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white



Item no.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.5.2 Marking strip



Item no.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.6 Power supply

1.1.6.1 Power supply unit



Item no.: 787-2852

Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current

1.1.7 Power tap

1.1.7.1 Power tap



Item no.: 855-8015

Power tap; for busbar; with fuse; Clamping connection



Item no.: 855-8006

Power tap; for busbar; with fuse; Mounting screw M6



Item no.: 855-8008

Power tap; for busbar; with fuse; Mounting screw M8



Item no.: 855-8003

Power tap; with fuse; 10 mm² (8 AWG) - 16 mm² (6 AWG); Phase



Item no.: 855-8001

Power tap; with fuse; 2,5 mm² (12 AWG) - 6 mm² (10 AWG); Phase



Item no.: 855-8004

Power tap; without fuse; 10 mm² (8 AWG) - 16 mm² (6 AWG); N-conductor



Item no.: 855-8002

Power tap; without fuse; 2,5 mm² (12 AWG) - 6 mm² (10 AWG); N-conductor

1.1.8 Relay module

1.1.8.1 Relay module



Item no.: 857-304

Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; Limiting continuous current: 6 A; Yellow status indicator; Module width: 6 mm; 2,50 mm²; gray

1.1.9 Terminal blocks

1.1.9.1 Supply module



Item no.: 857-979

Supply and through module

1.1.9.2 Through terminal block



Item no.: 857-979

Supply and through module

1.1.10 Test and measurement

1.1.10.1 Testing accessories



Item no.: 735-500

WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 6 mm uninsulated; Test lead for soldering up to 0,5mm²

1.1.11 Tool

1.1.11.1 Operating tool



Item no.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation notes

Configuring

Configuration via WAGO Interface Configuration Software

Configuration via WAGO Configuration Display

Commoning

Pluggable connection technology

Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.

Commoning

Pluggable connection technology

Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.

Security

Lock-out seal option