Kingbright

8mm ROUND LED LAMP

L-793GD

GREEN


Features

- •8mm DIAMETER BIG LAMP.
- •WIDE VIEWING ANGLE.
- •I.C.COMPATIBLE.
- •RELIABLE AND RUGGED.
- •LONG LIFE-SOLID STATE RELIABILITY.
- •RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

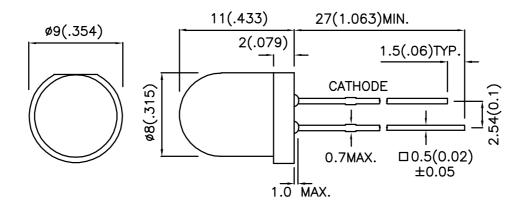

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

SPEC NO: DSAB8225 REV NO: V.5 DATE: MAR/20/2005 PAGE: 1 OF 3
APPROVED: J. Lu CHECKED: Allen Liu DRAWN: W.J.ZHU

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (mcd) @ 20mA		Viewing Angle
			Min.	Тур.	2 θ 1/2
L-793GD	GREEN (GaP)	GREEN DIFFUSED	18	60	60°

Note:

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lR	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at Ta=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
ead Solder Temperature [3] 260°C For 5 Seconds				

Notes:


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.

SPEC NO: DSAB8225 **REV NO: V.5** DATE: MAR/20/2005 PAGE: 2 OF 3 DRAWN: W.J.ZHU


APPROVED: J. Lu CHECKED: Allen Liu


 $^{1. \}theta 1/2$ is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Kingbright

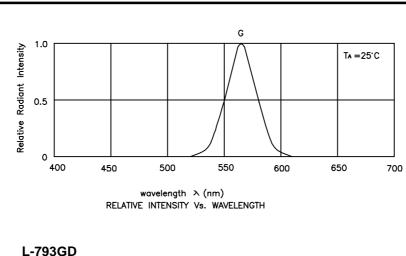



Green L-793GD











Remarks:

If special sorting is required (e.g. binning based on forward voltage,luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAB8225 REV NO: V.5 DATE: MAR/20/2005 PAGE: 3 OF 3

APPROVED: J. Lu CHECKED: Allen Liu DRAWN: W.J.ZHU