
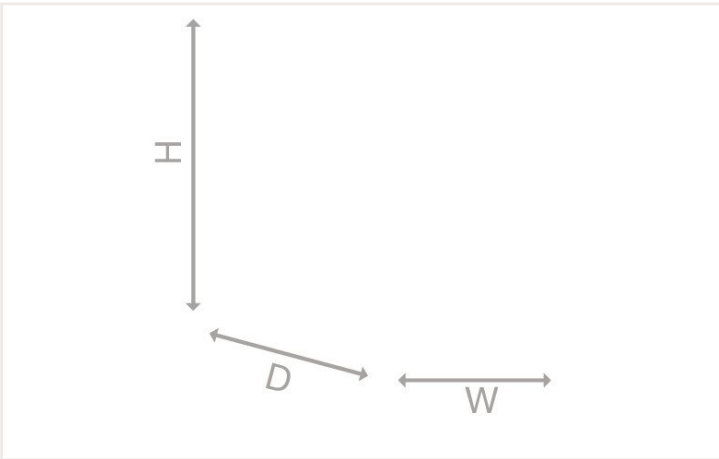


Data sheet | Item number: 787-1200

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 0.5 A output current; DC-OK LED

<https://www.wago.com/787-1200>

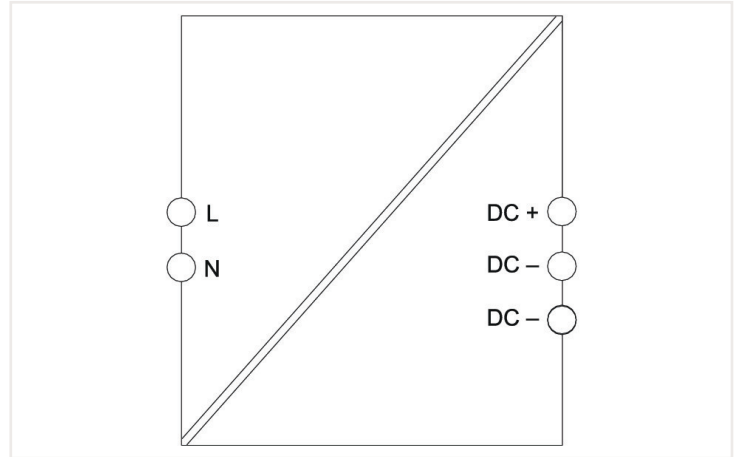

Features:

- Switched-mode power supply
- Stepped profile, ideal for distribution boards/boxes
- Pluggable *picoMAX*® Connection Technology (tool-free)
- Series operation
- Electrically isolated output voltage (SELV) per EN 62368/UL 62368 and EN 60335-1; PELV per EN 60204

Technical data	
Input	
Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V
Input voltage derating	-2 %/V (
Nominal mains frequency range	47 ... 63 Hz
Input current I_i	≤ 0.27 A (100 VAC; 0.5 ADC)
Discharge current	≤ 0.25 mA
Inrush current	≤ 30 A (NTC)
Power factor	≥ 0.5
Power factor correction (PFC)	none
Mains failure hold-up time	≥ 100 ms (230 VAC)
Output	
Nominal output voltage $U_{o, \text{nom}}$	DC 24 V (SELV)
Nominal output current $I_{o, \text{nom}}$	0.5 A
Nominal output power	12 W
Deviation	≤ 1 %
Deviation, dynamic load change 10 ... 90 %	≤ 1 %
Residual ripple	≤ 100 mV (Peak-to-peak)
Overload behavior	Shutdown and automatic restart in the event of a short circuit

Signaling and communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_I	≤ 0.2 W
Power loss (max.) $P_{I(max)}$	2.5 W (100 VAC / 24 VDC; 0.5 A)
Efficiency (typ.)	83 % (230 VAC; nominal load); 82 % (110 VAC; nominal load)

Circuit protection

Internal fuse	T 1 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Protection class	II
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Resistance to reverse feed	\leq DC 31 V
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Yes
Overvoltage protection; secondary	\leq 31 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	Yes, for 2 devices of the same type
MTBF	

Connection data

Connection type 1	Input
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Connection type 2	Output
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	<i>picoMAX</i> ® 3.5 (WAGO 2091 Series)
Solid conductor 2	0.2 ... 1.5 mm ² / 24 ... 14 AWG
Fine-stranded conductor 2	0.2 ... 1.5 mm ² / 24 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches
Cable length (max.)	30 m

Physical data

Width	18 mm / 0.7 inches
Height	90 mm / 3.543 inches
Depth	55 mm / 2.165 inches
Depth from upper-edge of DIN-rail	52.5 mm / 2.067 inches

Mechanical data

Mounting type	DIN-35 rail Screw mount (back/side)
---------------	--

Material data

Flammability class per UL94	V2
Fire load	0.072 MJ
Weight	63 g

Environmental requirements

Ambient temperature (operation at U_N)	-25 ... 70 °C
Surrounding air temperature (storage)	-40 ... +85 °C
Relative humidity	20 ... 90 % (no condensation permissible)
Derating	-2.6 %/K (

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368 UL 62368 UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 Stück
Packaging type	Box
Country of origin	CN
GTIN	4055143812184
Customs tariff number	85044082900

Approvals and certificates

General approvals



General approvals

UR UL 62368-1 E255815
Underwriters Laboratories
Inc.

Approval	Standard	Certificate name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011,TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19
UL Underwriters Laboratories Inc.	UL 508	E255817

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 787-1200	↓

Documentation

Manual			
Product Manual Power Supply 24 V	V 1.0.0	pdf 1199.71 KB	↓

Bid Text			
787-1200	24.06.2019	xml 6.99 KB	↓
787-1200	12.06.2019	docx 20.30 KB	↓
ausschreiben.de 787-1200			↓

Instruction Leaflet			
Primär getaktete Stromversorgungen COMPACT	V 2.0.0 20.11.2020	pdf 2334.72 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 787-1200	↓

CAE data	
EPLAN Data Portal 787-1200	↓
ZUKEN Portal 787-1200	↓

1 Compatible products

1.1 Optional accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

<p>Item no.: 216-301 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow</p>	<p>Item no.: 216-302 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise</p>	<p>Item no.: 216-201 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white</p>	<p>Item no.: 216-202 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray</p>
<p>Item no.: 216-203 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red</p>	<p>Item no.: 216-204 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black</p>		

1.1.2 Tool

1.1.2.1 Operating tool



Item no.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item no.: 210-769

SCREWDRIVER; green



Item no.: 2092-1630

Unlocking tool; orange