


| | | |
|----------|--------|-------|
| Ød ±0.05 | p = 10 | p >10 |
| | 0.6 | 0.8 |

All dimensions are in mm.

PRODUCT CODE SYSTEM

The part number, comprising 14 digits, is formed as follows:



- Digit 1 to 3 Series code.
- Digit 4 d.c. rated voltage:
D = 63V E =100V G= 160V I = 250V
M =400V P =630V Q=1000V
- Digit 5 Pitch:
F=10mm; I=15mm; N=22.5mm; R=27.5mm;
W=37.5mm
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and/or packaging (table1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use
- Digit 14 Capacitance tolerance:
J=5%; K=10%; M=20%.

Table 1 (for more detailed information, please refer to page 14)

| Standard packaging style | Lead length (mm) | Taping style | | | Ordering code (Digit 10 to 11) |
|----------------------------|---|---------------------|------------|------------|--------------------------------|
| | | P ₂ (mm) | Fig. (No.) | Pitch (mm) | |
| AMMO-PACK | | 12.70 | 1 | 10.0/15.0 | DQ |
| AMMO-PACK | | 19.05 | 2 | 22.5 | DQ |
| REEL Ø 355mm | | 12.70 | 1 | 10.0/15.0 | GY |
| REEL Ø 500mm | | 12.70 | 1 | 10.0/15.0 | CK |
| REEL Ø 500mm | | 19.05 | 2 | 22.5/27.5 | CK |
| Loose, short leads | 4 ⁺² | | | | AA |
| Loose, long leads (p=10mm) | 17 ^{+1/-2} | | | | Z3 |
| Loose, long leads (p≥15mm) | 30 ⁺⁵ 25 ^{+2/-1} | | | | 40 50 |

Note: Ammo-pack is the preferred packaging for taped version.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

Typical applications: blocking, coupling, decoupling, by-passing, interference suppression in low voltage applications (i.e.: AUTOMOTIVE).

PRODUCT CODE: R60

Note: Special version, in compliance with DIN 44122 is available upon request.

Construction:

- **STACKED technology for pitch 10mm (Rated Voltage from 63 to 630Vdc)**
- **WOUND technology from pitch 10 to 27.5mm (Rated Voltage from 63 to 1000Vdc)**

| Pitch (mm) | Box thickness (B) (mm) | Maximum dimensions (mm) | | |
|------------|------------------------|-------------------------|--------|--------|
| | | B max | H max | L max |
| 10.0 | All | B +0.2 | H +0.1 | L +0.2 |
| 15.0 | <7.5 | B +0.2 | H +0.1 | L +0.3 |
| 15.0 | ≥7.5 | B +0.2 | H +0.1 | L +0.5 |
| 22.5 | All | B +0.2 | H +0.1 | L +0.3 |
| 27.5 | All | B +0.2 | H +0.1 | L +0.3 |
| 37.5 | All | B +0.3 | H +0.1 | L +0.3 |


GENERAL TECHNICAL DATA

- Dielectric:** polyester film (polyethylene terephthalate).
- Plates:** aluminium layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** plastic case, thermosetting resin filled. Box material is solvent resistant and flame retardant according to UL94 V0.
- Marking:** Manufacturer's logo, capacitance, tolerance, D.C. rated voltage.

Climatic category: 55/105/56 IEC 60068-1
Operating temperature range: -55 to +105°C
 For stacked technology an upper operating temperature of +125°C is allowed for a max.operating time of 1000h.

Related documents: IEC 60384-2

Winding scheme

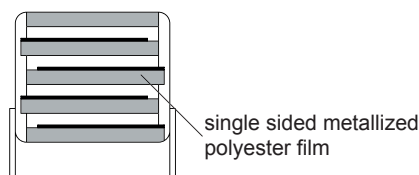

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

STACKED VERSION

| Rated Cap. | 63Vdc/40Vac Std dimensions | | | | Max dv/dt (V/μs) | Max K ₀ (V ² /μs) | Part Number |
|------------|-------------------------------|------|------|------|---------------------|--|----------------|
| | B | H | L | p | | | |
| 1.0 μF | 4.0 | 9.0 | 13.0 | 10.0 | 50 | 6.3 E3 | R60DF4100--6-- |
| 1.5 μF | 5.0 | 11.0 | 13.0 | 10.0 | 50 | 6.3 E3 | R60DF4150--6-- |
| 2.2 μF | 5.0 | 11.0 | 13.0 | 10.0 | 50 | 6.3 E3 | R60DF4220--6-- |
| 3.3 μF | 6.0 | 12.0 | 13.0 | 10.0 | 50 | 6.3 E3 | R60DF4330--6-- |

| Rated Cap. | 100Vdc/63Vac Std dimensions | | | | Max dv/dt (V/μs) | Max K ₀ (V ² /μs) | Part Number |
|------------|--------------------------------|------|------|------|---------------------|--|----------------|
| | B | H | L | p | | | |
| 0.33 μF | 4.0 | 9.0 | 13.0 | 10.0 | 75 | 15 E3 | R60EF3330--6-- |
| 0.47 μF | 4.0 | 9.0 | 13.0 | 10.0 | 75 | 15 E3 | R60EF3470--6-- |
| 0.68 μF | 4.0 | 9.0 | 13.0 | 10.0 | 75 | 15 E3 | R60EF3680--6-- |
| 1.0 μF | 5.0 | 11.0 | 13.0 | 10.0 | 75 | 15 E3 | R60EF4100--6-- |
| 1.5 μF | 5.0 | 11.0 | 13.0 | 10.0 | 75 | 15 E3 | R60EF4150--6-- |

| Rated Cap. | 160Vdc/90Vac Std dimensions | | | | Max dv/dt (V/μs) | Max K ₀ (V ² /μs) | Part Number |
|------------|--------------------------------|------|------|------|---------------------|--|----------------|
| | B | H | L | p | | | |
| 0.22 μF | 4.0 | 9.0 | 13.0 | 10.0 | 100 | 32 E3 | R60GF3220--6-- |
| 0.33 μF | 4.0 | 9.0 | 13.0 | 10.0 | 100 | 32 E3 | R60GF3330--6-- |
| 0.47 μF | 5.0 | 11.0 | 13.0 | 10.0 | 100 | 32 E3 | R60GF3470--6-- |
| 0.68 μF | 6.0 | 12.0 | 13.0 | 10.0 | 100 | 32 E3 | R60GF3680--6-- |

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (±5%); K (±10%); M (±20%) _____

| Rated Cap. | 250Vdc/160Vac Std dimensions | | | | Max dv/dt (V/μs) | Max K ₀ (V ² /μs) | Part Number |
|------------|---------------------------------|------|------|------|---------------------|--|----------------|
| | B | H | L | p | | | |
| 0.10 μF | 4.0 | 9.0 | 13.0 | 10.0 | 150 | 75 E3 | R60IF3100--6-- |
| 0.15 μF | 4.0 | 9.0 | 13.0 | 10.0 | 150 | 75 E3 | R60IF3150--6-- |
| 0.22 μF | 5.0 | 11.0 | 13.0 | 10.0 | 150 | 75 E3 | R60IF3220--6-- |
| 0.33 μF | 5.0 | 11.0 | 13.0 | 10.0 | 150 | 75 E3 | R60IF3330--6-- |
| 0.47 μF | 6.0 | 12.0 | 13.0 | 10.0 | 150 | 75 E3 | R60IF3470--6-- |

| Rated Cap. | 400Vdc/200Vac Std dimensions | | | | Max dv/dt (V/μs) | Max K ₀ (V ² /μs) | Part Number |
|------------|---------------------------------|------|------|------|---------------------|--|----------------|
| | B | H | L | p | | | |
| 0.033 μF | 4.0 | 9.0 | 13.0 | 10.0 | 175 | 140 E3 | R60MF2330--6-- |
| 0.047 μF | 4.0 | 9.0 | 13.0 | 10.0 | 175 | 140 E3 | R60MF2470--6-- |
| 0.068 μF | 4.0 | 9.0 | 13.0 | 10.0 | 175 | 140 E3 | R60MF2680--6-- |
| 0.10 μF | 5.0 | 11.0 | 13.0 | 10.0 | 175 | 140 E3 | R60MF3100--6-- |
| 0.15 μF | 6.0 | 12.0 | 13.0 | 10.0 | 175 | 140 E3 | R60MF3150--6-- |

| Rated Cap. | 630Vdc/220*Vac Std dimensions | | | | Max dv/dt (V/μs) | Max K ₀ (V ² /μs) | Part Number |
|------------|----------------------------------|------|------|------|---------------------|--|----------------|
| | B | H | L | p | | | |
| 0.010 μF | 4.0 | 9.0 | 13.0 | 10.0 | 200 | 250 E3 | R60PF2100--6-- |
| 0.015 μF | 4.0 | 9.0 | 13.0 | 10.0 | 200 | 250 E3 | R60PF2150--6-- |
| 0.022 μF | 4.0 | 9.0 | 13.0 | 10.0 | 200 | 250 E3 | R60PF2220--6-- |
| 0.033 μF | 5.0 | 11.0 | 13.0 | 10.0 | 200 | 250 E3 | R60PF2330--6-- |
| 0.047 μF | 5.0 | 11.0 | 13.0 | 10.0 | 200 | 250 E3 | R60PF2470--6-- |

Mechanical version and packaging (Table1) _____
 Internal use _____
 Tolerance: J (±5%); K (±10%); M (±20%) _____

All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.

The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

*Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 167).

METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS

PRODUCT CODE: R60

WOUND VERSION

Table with columns: Rated Cap., 400Vdc/200Vac Std dimensions (B, H, L, p), Max dv/dt (V/μs), Max K₀ (V²/μs), Part Number. Includes tables for 1000Vdc/250Vac* and 630Vdc/220*Vac sections.

Mechanical version and packaging (Table1) Internal use Tolerance: J (±5%); K (±10%); M (±20%)

All dimensions are in mm.

Note 1: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V. The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

Note 2: Rated voltages higher than 1000Vdc are available upon request.

* Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 167).

Mechanical version and packaging (Table1) Internal use Tolerance: J (±5%); K (±10%); M (±20%)

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R): 63 Vdc -100 Vdc - 160 Vdc - 250 Vdc
400 Vdc - 630 Vdc-1000 Vdc .

Rated temperature (T_R): +85°C

Temperature derated voltage:

for temperatures between +85°C and the upper operating temperature (+105°C for wound technology and +125°C for stacked technology) a decreasing factor of 1.25% per degree °C on the rated voltage V_R (d.c. and a.c.) has to be applied.

Capacitance range: 1000pF to 220µF

Capacitance values:

E6 series (IEC 60063 Norm).

Capacitance tolerances (measured at 1 kHz):
±5% (J); ±10% (K); ±20% (M).

Total self-inductance (L): (lead length ~2mm)

| | | | | | |
|------------|----|----|------|------|------|
| Pitch (mm) | 10 | 15 | 22.5 | 27.5 | 37.5 |
| L(nH) ≈ | 9 | 10 | 18 | 18 | 22 |

Dissipation factor (DF):

tgδ 10⁻⁴ at +25°C ±5°C

| | | |
|-----|-------|-------|
| kHz | C≤1µF | C>1µF |
| 1 | ≤100 | ≤100 |
| 10 | ≤150 | |

Insulation resistance:

Test conditions

Temperature: +25°C±5°C

Voltage charge time: 1 min

Voltage charge: 50 Vdc for $V_R < 100$ Vdc
100 Vdc for $V_R ≥ 100$ Vdc

Performance

For $V_R ≤ 100$ Vdc

≥3750 MΩ for C ≤0.33µF (50000 MΩ)*

≥1250 s for C >0.33µF (5000 s)*

For $V_R > 100$ Vdc

≥30000 MΩ for C ≤0.33µF (50000 MΩ)*

≥10000 s for C >0.33µF (17000 s)*

*Typical value

Test voltage between terminations:

1.6x V_R applied for 2 s at +25°C±5°C

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions

Temperature: +40°C±2°C

Relative humidity (RH): 93% ±2%

Test duration: 56 days

Performance

Capacitance change |ΔC/C|: ≤5%

DF change (Δtgδ): ≤50x10⁻⁴ at 1kHz

Insulation resistance: ≥50% of initial limit.

Endurance:

Test conditions

Temperature: +105°C±2°C

Test duration: 2000 h

Voltage applied: 1.25x V_C

Performance

Capacitance change |ΔC/C|: ≤5%

DF change (Δtgδ): ≤50x10⁻⁴ at 10kHz for C≤1µF
≤30x10⁻⁴ at 1kHz for C>1µF

Insulation resistance: ≥50% of initial limit.

Resistance to soldering heat:

Test conditions

Solder bath temperature: +260°C±5°C

Dipping time (with heat screen): 10 s ±1 s

Performance

Capacitance change |ΔC/C|: ≤2%

DF change (Δtgδ): ≤50x10⁻⁴ at 10kHz for C≤1µF
≤30x10⁻⁴ at 1kHz for C>1µF

Insulation resistance: ≥ initial limit.

Long term stability (after two years):

Storage: standard environmental conditions (see page 12).

Performance

Capacitance change |ΔC/C|: ≤3% for C ≤0.1µF
≤2% for C >0.1µF

RELIABILITY:

Reference MIL HDB 217

Application conditions:

Temperature: +40°C±2°C

Voltage: 0.5x V_R

Failure rate: ≤5 FIT

(1 FIT = 1x10⁻⁹ failures/componentsxh)

Failure criteria:

Short or open circuit

Capacitance change |ΔC/C|: >10%








DF change (Δtgδ): >2xinitial limit.

Insulation resistance: <0.005xinitial limit.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

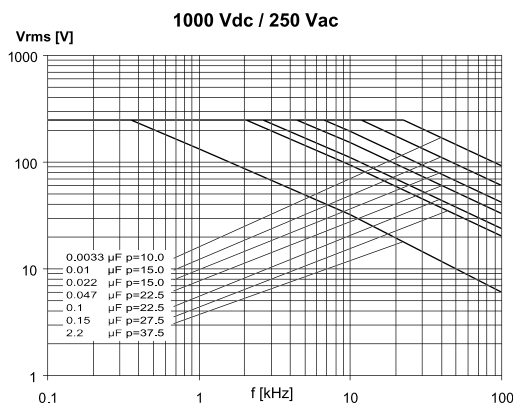
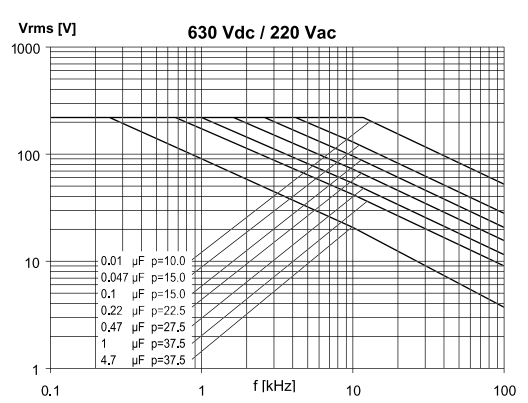
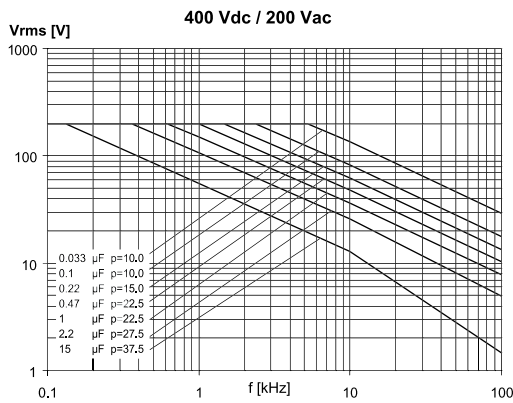
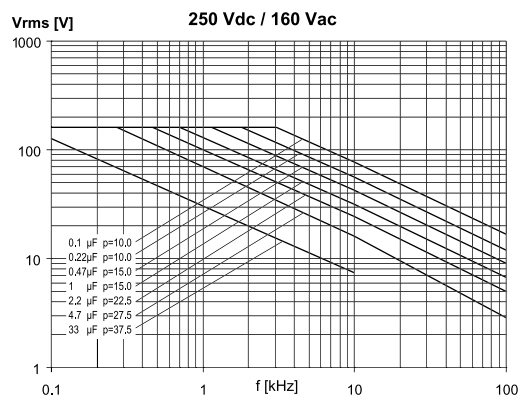
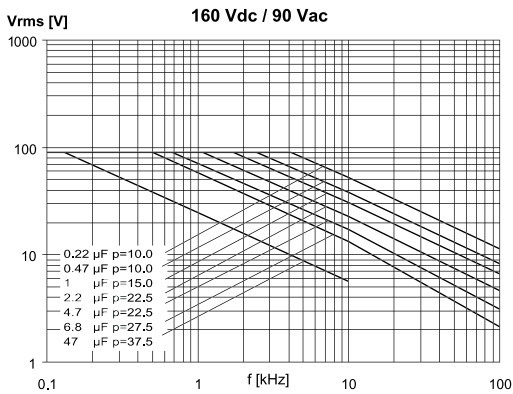
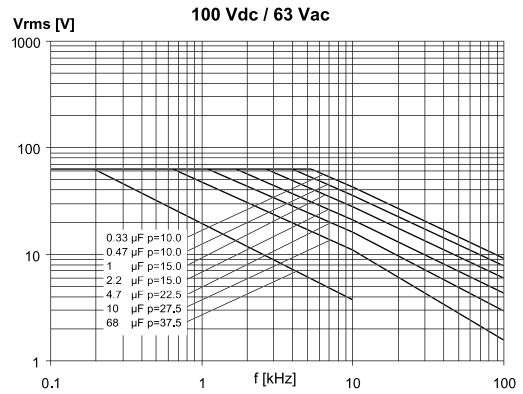
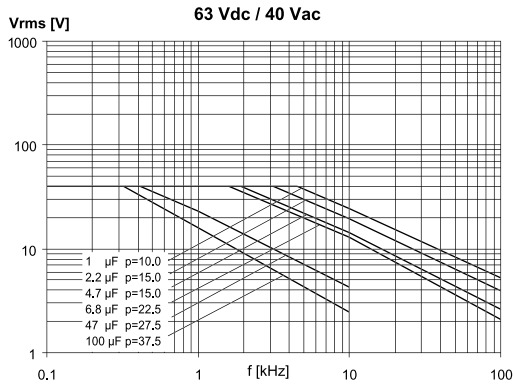


Note: p (pitch) in mm.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

MAX. CURRENT ($I_{r.m.s.}$) VERSUS FREQUENCY (sinusoidal wave-form / $T_h \leq 40^\circ\text{C}$)

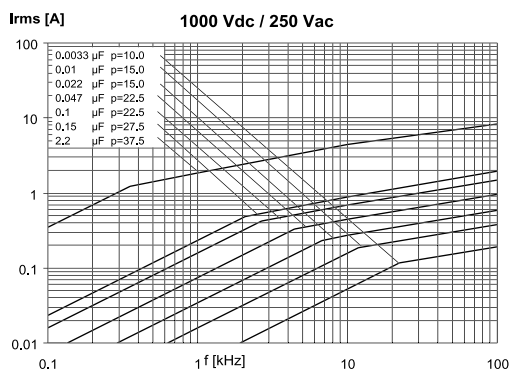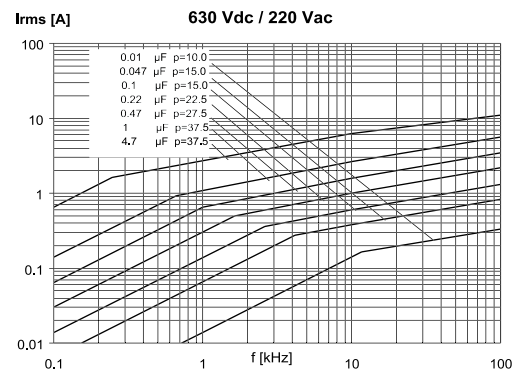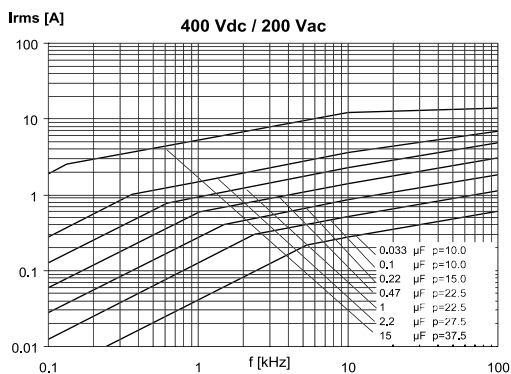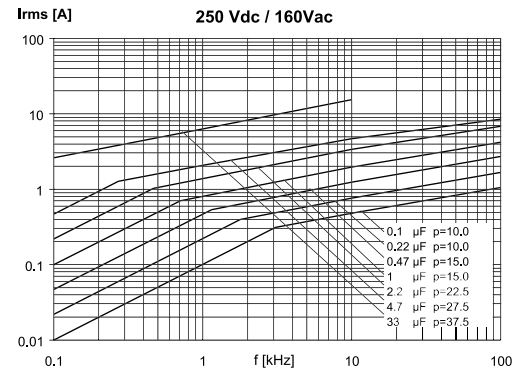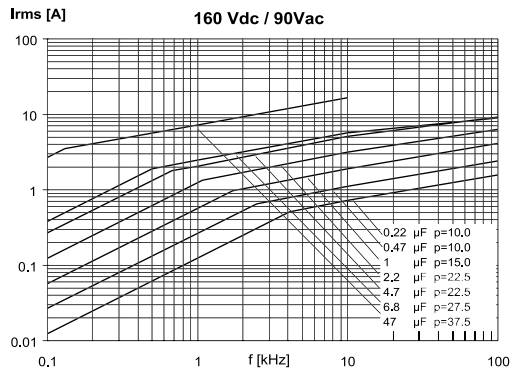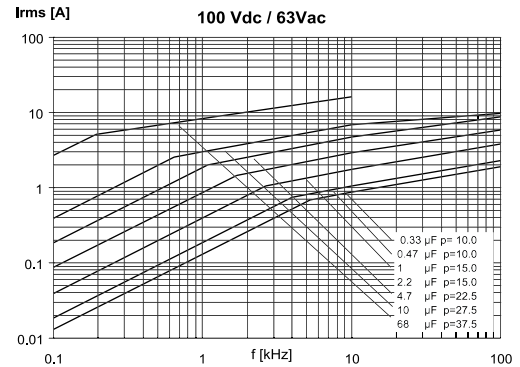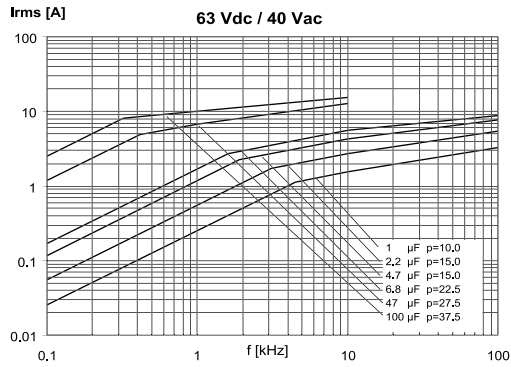

Note: p (pitch) in mm.