3331
SERIES

SPECIFICATION

RATING	: 10A 125VAC , 5A 250VAC (UL,C-UL,ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 ºC TO 55 ºC
ELECTRICAL LIFE	: 10,000 CYCLES

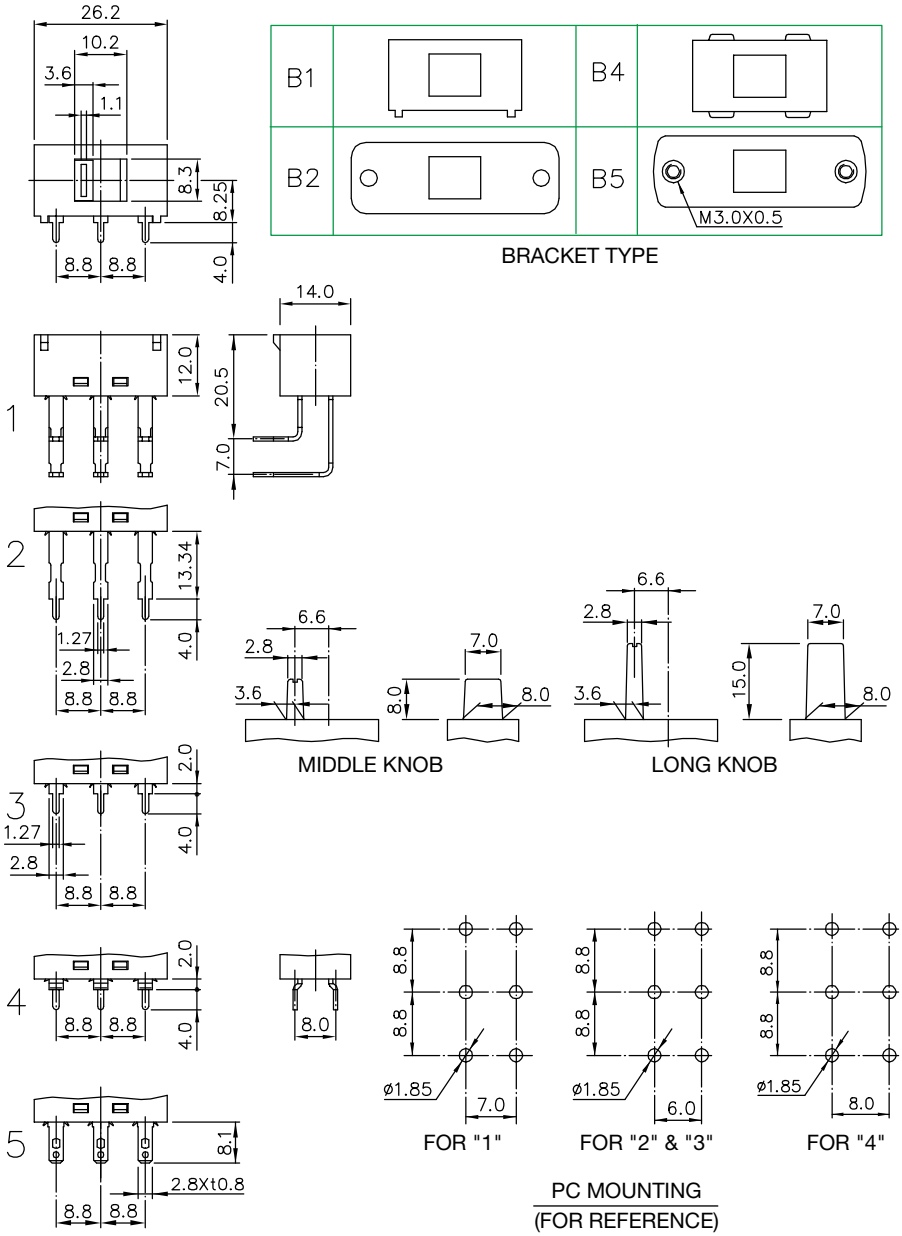

SWITCH FUNCTION				
MODEL NO.			OPERA -TIONS	APPROVEL
3331	ON	OFF	SPST	
3331	ON	OFF	SPDT	
3331	ON	ON	DPST	
3331	ON	ON	DPDT	

TERMINAL'S TYPE	
1	PC TERMINAL (90°)
2	PC TERMINAL
3	PC TERMINAL
4	PC TERMINAL
5	QUICK TERMINAL