



**DIMENSIONS: (Unit: mm)**

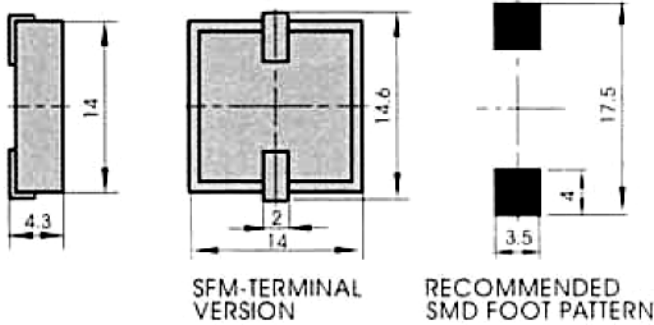

**CHARACTERISTICS:**

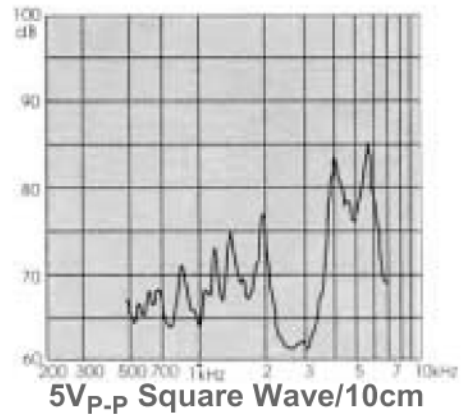

**ELECTRICAL SPECIFICATIONS :**

Model No.	SMT-1443
Min. Sound Pressure Level (dB)	75 /4.0kHz /5V <sub>p-p</sub> Square Wave /10cm
Capacitance at 1000Hz (nF)	10 ± 30%
Allowable Input Voltage (V <sub>p-p</sub> )	20
Max. Consumption (mA)	2 /4.0kHz /5V <sub>p-p</sub> Square Wave
Resonant Frequency (kHz)	4.0 ± 0.3
Operating Temperature (°C)	-20 ~ +85
Case Material/Colour	PPS/Black
Weight (g)	1.1


**PACKING INFORMATION:**

Packing	10000 pcs per export carton
Carton Size	50.5 X 29 X 16 cm
G. Weight	16.4 kgs
N. Weight	11 kgs
N. Weight	11 kgs

**PACKING INFORMATION:**


**TAPE TYPE INFORMATION:**

The design for such tape packing was executed under standard IEC -286-3  
The material of the tape is polystyrene in black color. detailed dimensions are as below :

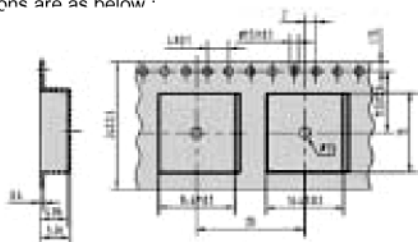

**DIMENSIONS OF THE ROLLING PLATE:**

The material of the rolling plate is in paper;  
The dimensions of the rolling plate are as below:



**PACKING DIMENSIONS AND QUANTITY:**

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 650 pcs of the transducer per plate.
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 6,500 pcs of the transducer.
- The total gross weight per carton is 12.7Kgs,while net weight is 7.2Kgs.