




electronics

Rising Clamp - Single Row

Range: PCB Terminal Blocks, Connectors and Fuse Holders

JPR Part Number: 710-015

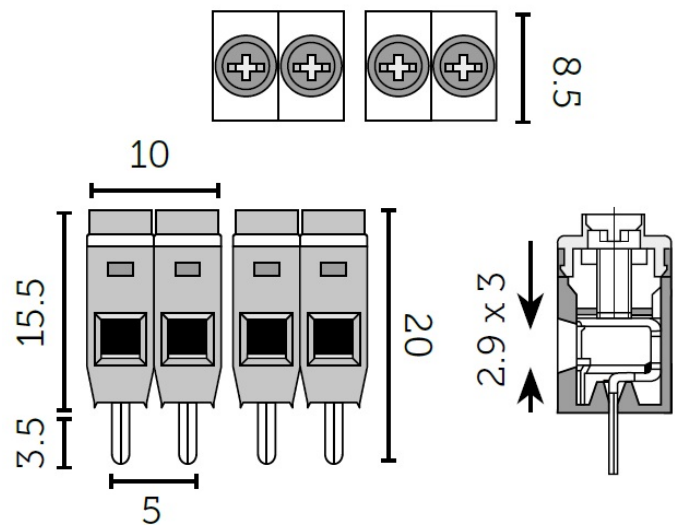

DESCRIPTION

36 Pole PCB Terminal Block. Professional rising clamp terminals, Rating 24A/250V, this 36 pole connector block can be easily cut into sections, to suit your requirements.

Manufactured from UL94-V0 flame retardant Polycarbonate and with tinned, nickel-plated brass Pins/Terminals.

Subject to technical modification without notice. Typographical and other errors do not justify claim for damages.

PCB TERMINAL BLOCKS, CONNECTORS AND FUSE HOLDERS FEATURES

- Cable acceptance - 0.2-3.6mm solid/stranded cable
- Guided pin alignment, anti solder wicking
- Recommended PCB hold size 1.3mm
- Screw/Torque M2.5 steel, zinc plated. 0.5Nm
- Pin/Terminal - tinned, nickel-plated brass
- Rising clamp - steel, zinc plated
- Dielectric strength >2.5kV, impulse withstand voltage -4kV
- Rating 24A/250V, working temperature 100 C
- Material - Polycarbonate UL94-V0 flame retardant

JPR Electronics Ltd
Unit 4, Circle Business Centre,
Blackburn road,
Dunstable. LU5 5DD.
England.

t: +44 (0) 1582 47 00 00
e: sales@jprelec.co.uk
www.jprelec.co.uk



electronics

SPECIFICATION

Type:	36 POLE PCB Terminal Blocks
Connection Method:	Rising clamp – Steel, zinc plated
Min Wire Size (Sq mm):	0.2
Max Wire Size (Sq mm):	3.6
Max Current (A):	24
Max Voltage (V):	250
Height (mm):	20
Standard Colour:	Grey
Width (mm):	8.5
Length (mm):	180
PCB Hole Diameter (mm):	1.3
Contacts Material:	Tinned, nickel plated brass
Dielectric Strength:	≥2.5kV
PCB Hole Size (Recommended) (mm):	3.5
Body Material:	Polycarbonate UL94-V0 flame retardant

JPR Electronics Ltd
Unit 4, Circle Business Centre,
Blackburn Road,
Dunstable.
Beds. LU5 5DD

t: +44(0)1582 47 00 00
e: sales@jprelec.co.uk
www.jprelec.co.uk