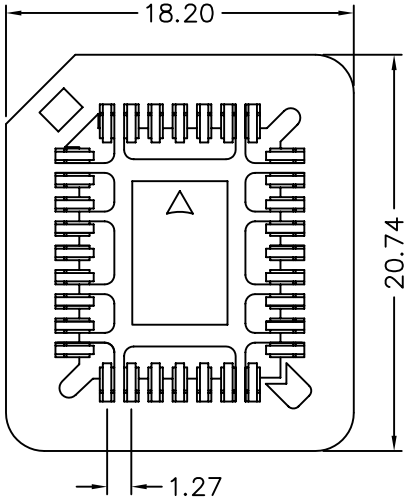

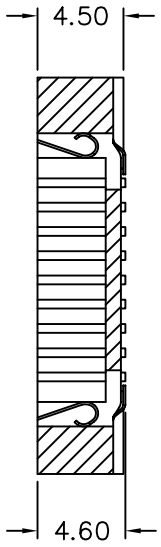

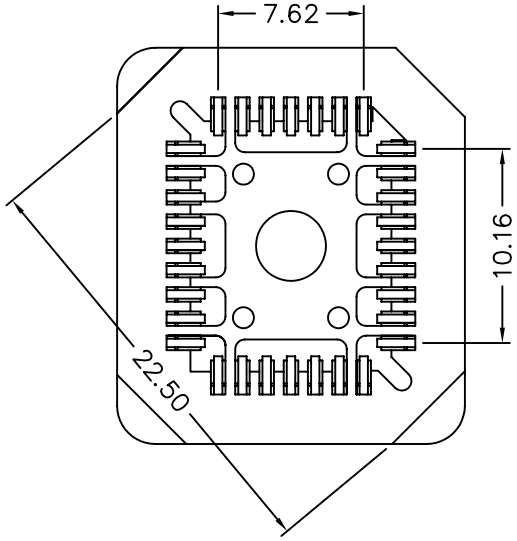

MATERIAL

Insulator : Hi-temp PPS. UL 94V-0, 240°C
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 1000MΩMin. at DC 500V
Contact Resistance : 30mΩMax. at DC 100mA
Operation Temperature : -50°C to + 105°C

981-2 2- 32 4 0 0 1
1 2 3 4 5 6 7

1. 1: DIP
   2: SMT
2. 2: Tube
3. No. of contacts per row
4. 2: Brown Insulator
   4: Brown Insulator (Green Product)
5. 0: Without stand off
6. 0: Tin plated
7. Pinrex internal code.

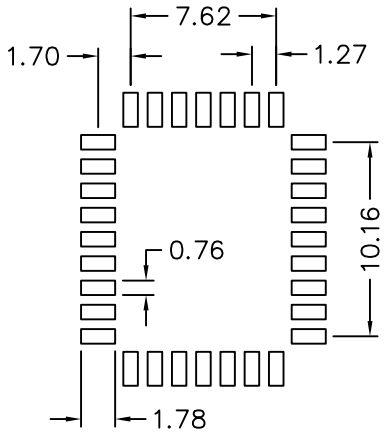

Recommended P.C.B Layout

A	RELEASE	2005/01/24
REV.	DESCRIPTION	DATE

TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3°

UNITS : mm

SCALE NONE | SIZE A4

OLD PART NO. SPLCC-32TNB

DRAWER Kent | CHECK

SHEET 1 OF 1 | REV. A | APP'D

TITLE PLCC SOCKET SURFACE SMT TYPE, TUBE

NEW PART NO. 981-22-324001

頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO. 981-22-324001