


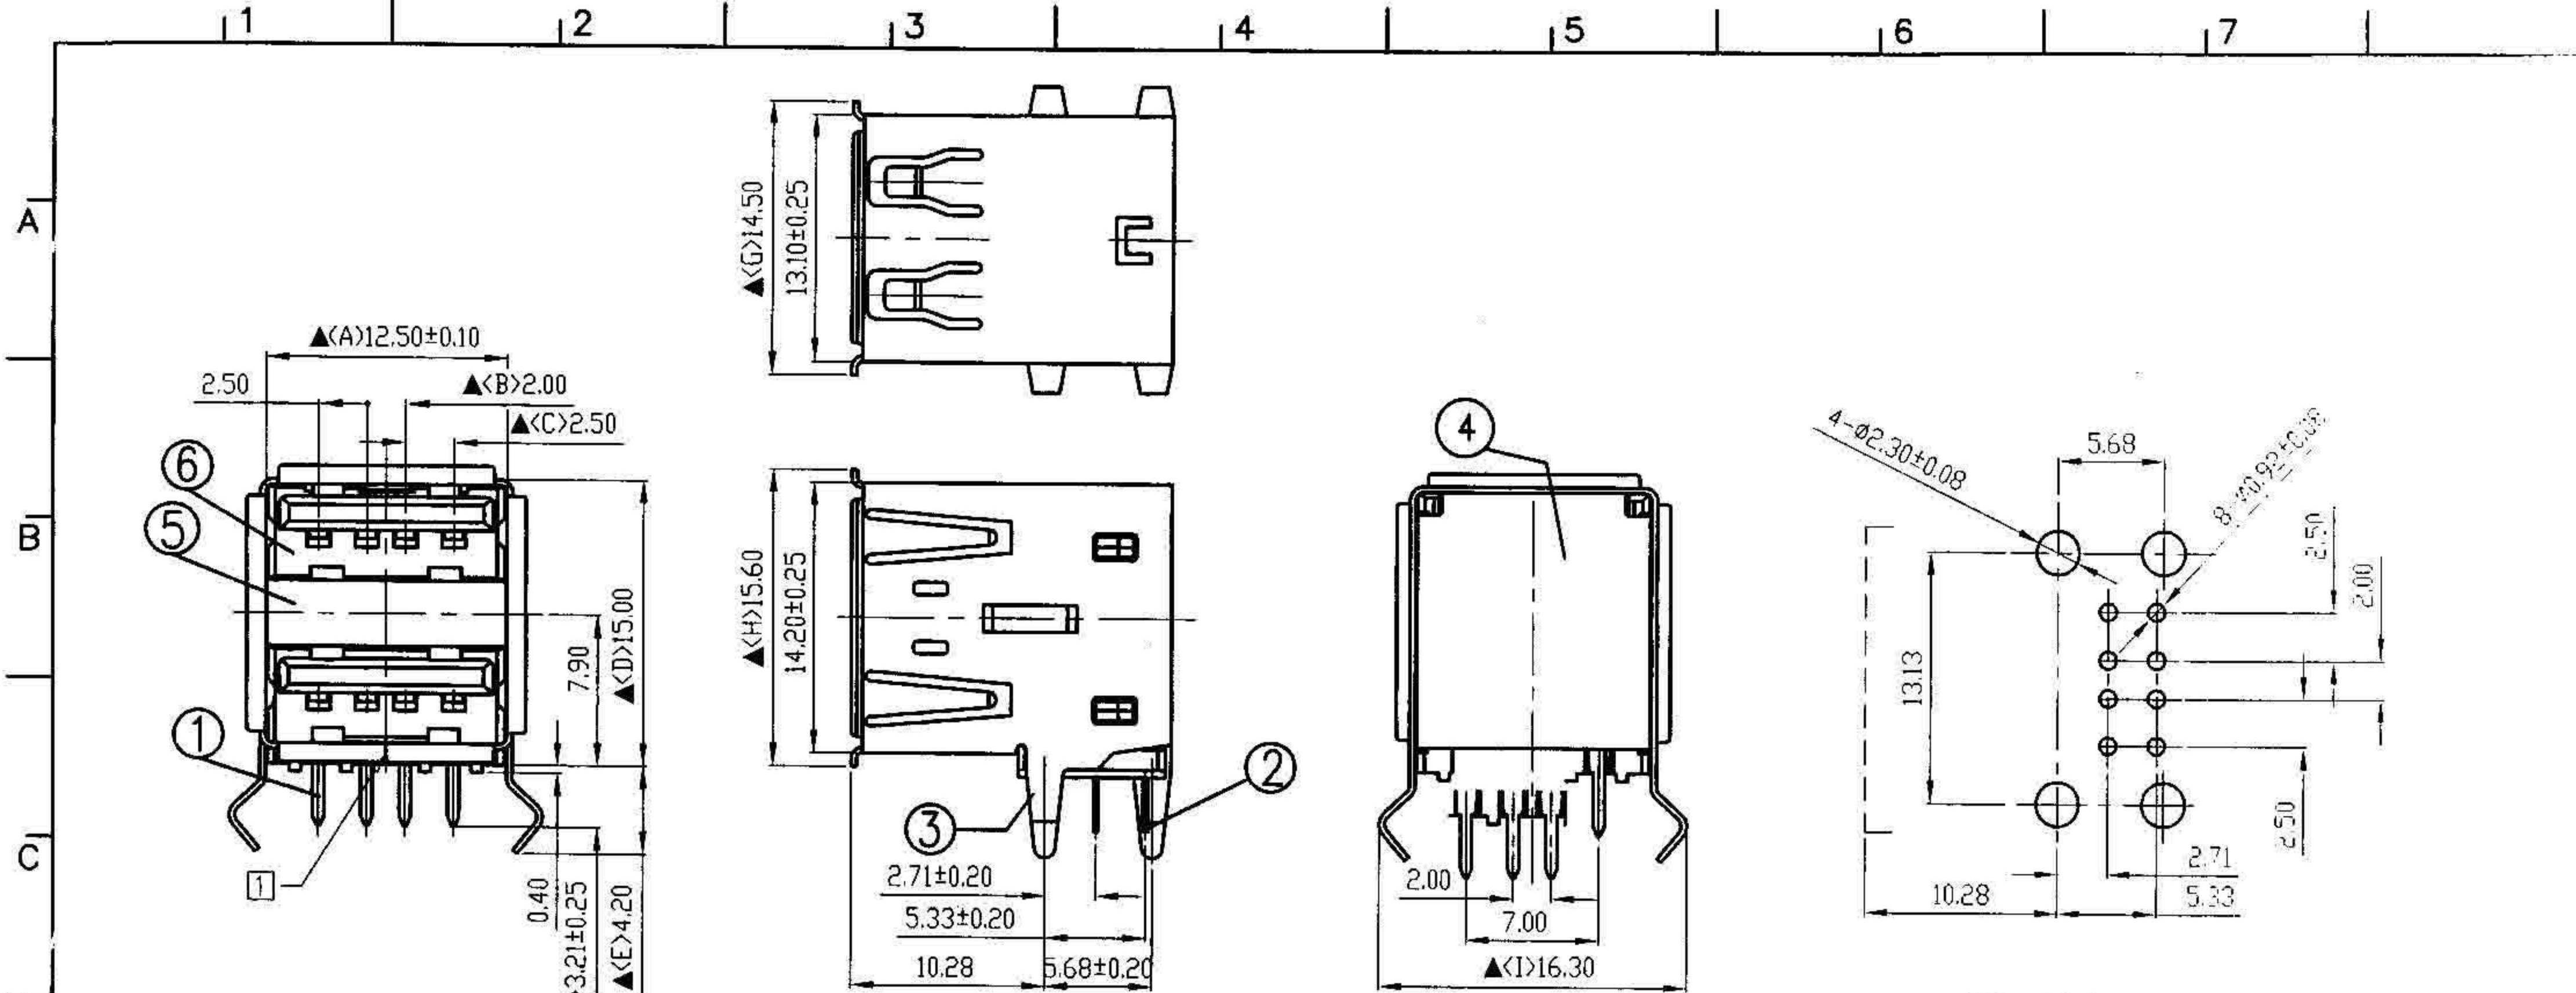

GAP. 0.25mm (Max.)

6.	Housing	PBT+30%G,UL 94V-0	1	White Color
5.	Spring	0.3T Phosphor Bronze	1	Nickel Plated
4.	Rear Shell	0.3T Iron	1	Nickel Plated
3.	Front Shell	0.3T Bronze	1	Nickel Plated
2.	Terminal	0.25T Phosphor Bronze	4	Gold Flash Over 50u"(min.) Nickel,Tin
1.	Terminal	0.25T Phosphor Bronze	4	Gold Flash Over 50u"(min.) Nickel,Tin
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
03.21.2006	易愛娣	陳美如	許家銘	

PART NAME : USB A-TYPE SOCKET CONNECTOR	PART NUMBER:	VERSION:4.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

Pin Hole Layout
(Jack Bottom View)

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

