





Rating	8A 125V AC 4A 250V AC		Mounting Hole	Circuit Diagram
	10(2)A 125/250Va.c.			
	6A 250VAC, 10A 125VAC			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-20°C~85°C	Thickness	X	Y
Switch Function	4P DPST ON-OFF	0.75...1.25	19.2-0.1	13.1+0.1
		1.25...2	19.4-0.1	13.1+0.1
		2...3	19.8-0.1	13.1+0.1

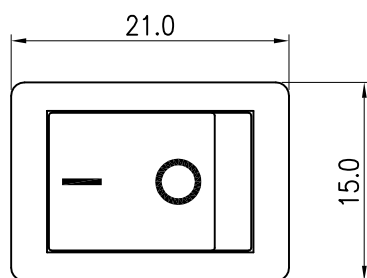

Material:
Frame: Black, Nylon#66
Actuator: Black, Nylon#66
Printed: White, hot stamping

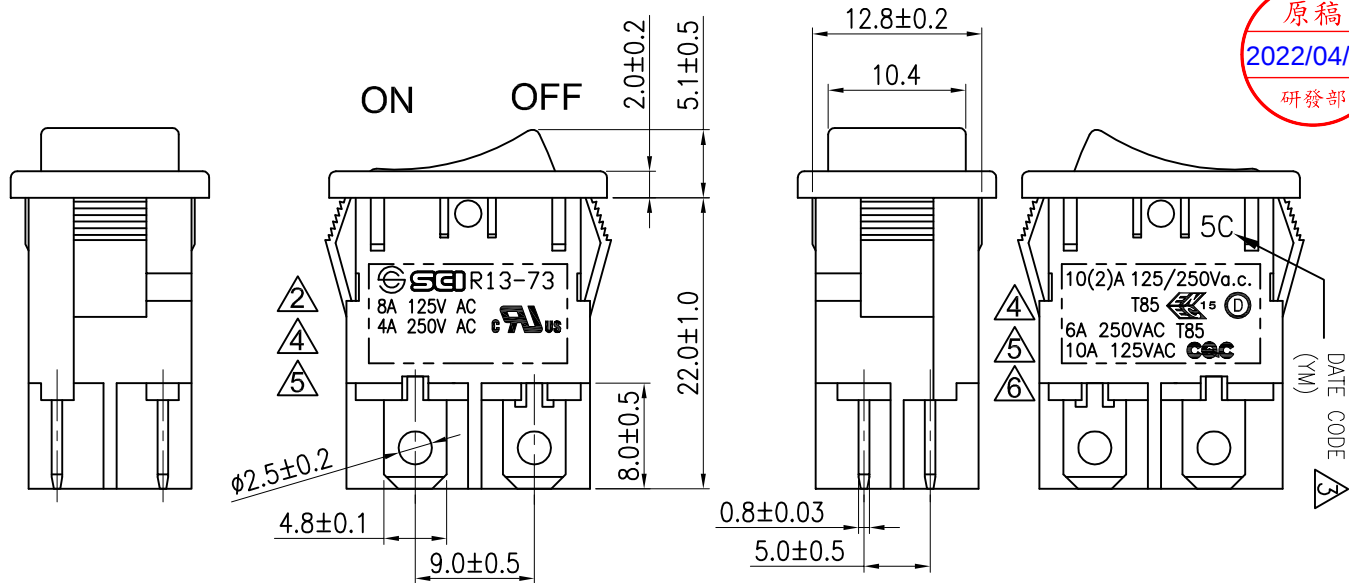

Tolerances ±0.3 Unless Otherwise Specified

03/31/'22	曾敏捷	依ECR(JHF20220225-009)修改CQC安規標示			△6
12/9/'21	林珮呈	據ECR#RAD20210824-393外觀圖恢復沖字標示,去除沖字圖號標示			△6
04/23/'21	曾敏捷	外觀圖取消安規標示,增加刻字圖號標示			△4
3/31/'15	周傑輝	依實物增加日期標示			△3
8/5/'13	周傑輝	增加SCI刻字和更新安規			△2
09/29/'10	邱 權	本體刻字更新			△1
Date	Name	Description			No.
Drawn	Checked	Approved	SCI BOM No.	1820621	Model Name
曾敏捷	符列亞	李理	Customer No.	JPR 800-196	Model No.
03/31/'22	2022/04/22	2022/04/25	Unit	mm	Shin Chin Industrial Co., Ltd.
					Rev.
					6