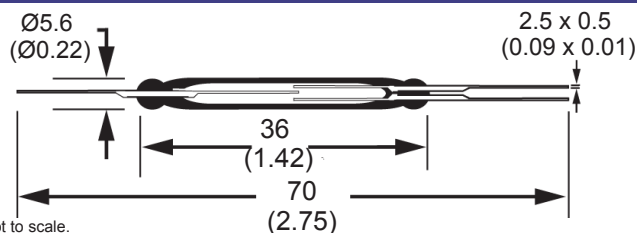


Part Number: GC1917
Reed Switch - Standard - Change-Over Contacts
Product Data Sheet

PICTURE


cULus File # E103299

✓ **RoHS Compliant**

DIMENSIONS


Drawings not to scale.
 All dimensions in mm (inches).

SPECIFICATION

Contact Form		Change-Over
Contact Material		Rhodium
Switching Capacity	Max.	60 W/VA
Switching Voltage	Max.	400 VAC / DC
Switching Current	Max.	1.0 A
Carrying Current	Max.	2.0 A
Dielectric Strength	Min.	1000 VDC
Contact Resistance	Max.	100 m Ω
Insulation Resistance	Min.	10 ⁹ Ω
Pull - In Sensitivity		50 - 80 AT
Drop - Out Sensitivity	Min.	20 AT
Switching Time without Bounce	Max.	4.0 ms
Operate Time	Max.	1.5 ms
Bounce Time	Max.	0.5 ms
Release Time	Max.	1.5 ms
Resonant Frequency	Typ.	-
Operating Frequency	Max.	100 Hz
Vibration (10-1000Hz)		35 g
Shock (11 ms)		50
Capacitance	Typ.	1.0 pF
Operate Temperature Range		-40°C + 125°C
Test Coil	Type	1500

NOTE

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (0.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

ORDERING INFORMATION

PART NUMBER **GC1917** **50** **80**

- Type _____
- Minimum (AT) Sensitivity _____
- Maximum (AT) Sensitivity _____

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemblech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 42023510

©2016 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

Rev: 3 - Date: Oct/6/2016 - Signature: BR

An ISO 9001 Certified Company