



Features:


- 1W Low Profile <15.5mm Height
- MTBF: 1,000,000 Hours
- Wide Input Range: 85 - 305VAC, (100-430VDC)
- Low Standby Power <0.15W
- High Temperature 85°C Full Load
- EMC Compliant - No External Components
- TUV, UL

Part Number	Power Rating Watts	Output Voltage (VDC)	Output Current (mA)	Ambient Temp. (°C)	Efficiency Typical	Voltage Range
VTX-214-001-303	1	3.3	300	85	>72%	85 - 305VAC (100-430VDC)
VTX-214-001-305	1	5	200			
VTX-214-001-306	1	6	166			
VTX-214-001-307	1	7.5	133			
VTX-214-001-308	1	8	125			
VTX-214-001-309	1	9	111			
VTX-214-001-310	1	10	100			
VTX-214-001-312	1	12	83			
VTX-214-001-315	1	15	66			
VTX-214-001-318	1	18	55			
VTX-214-001-324	1	24	42			
VTX-214-001-348	1	48	21			
Note: Other output voltages are available upon request.						

Optional Universal PCB mounting kit.

Part Number:

VTX-214-PCB2

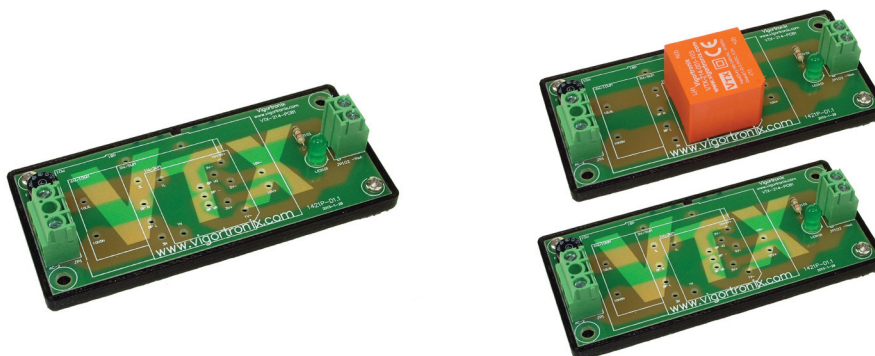

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK

Tel. +44 (0)1993 777570 Fax. +44 (0)1993 777580 Web. www.vigortronix.com E-mail: sales@vigortronix.com


Vigortronix is a trading name of Vigortronix (UK) Limited

Vigortronix.com

Model: 1 Watt		Specification
INPUT Pin 1: L Pin 2: N	Voltage Range	85 ~ 305VAC / 47 ~ 63Hz
	Current	200mA Max (100VAC) / 100mA Max (240VAC)
	Inrush Current	6A Max (100VAC) / 10A Max (240VAC)
	No Load power	0.15W Max
	Leakage Current	0.2 mA Max
OUTPUT Pin 4: DC+ Pin 3: 0V	Voltage Accuracy	3% (3.3VDC 5%)
	Ripple	200mV (Vp~p)
	Noise	200mV (Vp~p)
	Efficiency @ 230VAC	>72%
	Minimum Load	0
Protection	Over Power	Hiccup mode
	Over Voltage	Hiccup mode
	Short Circuit Protection	Hiccup mode
Dielectric Isolation	Input to Output	3600Vrms
Enviroment	Operating Temperature	-25°C ~ +85°C (See Derating Curve)
	Storage Temperature	-40°C ~ +105°C
	MTBF	>1,000,000Hrs @ 25°C (MIL-HDBK-217F)
	Weight	20g
Safety	Agency Standards	Compliance with IEC60950-1, EN60950-1, IEC61558-1, EN61558-1, EN61558-2-6, EN61558-2-17
EMC	EMI	Compliance with EN55022 Class B, EN61000-3-2, 3
	EMS	Compliance with EN55024, EN55014-1, EN55014-2, EN61000-4-2,3,4,5,6,8,11 Class A, (Surge L-N: 1KV),

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
 The information contained in this document is subject to change without notice.


Converter Schematic

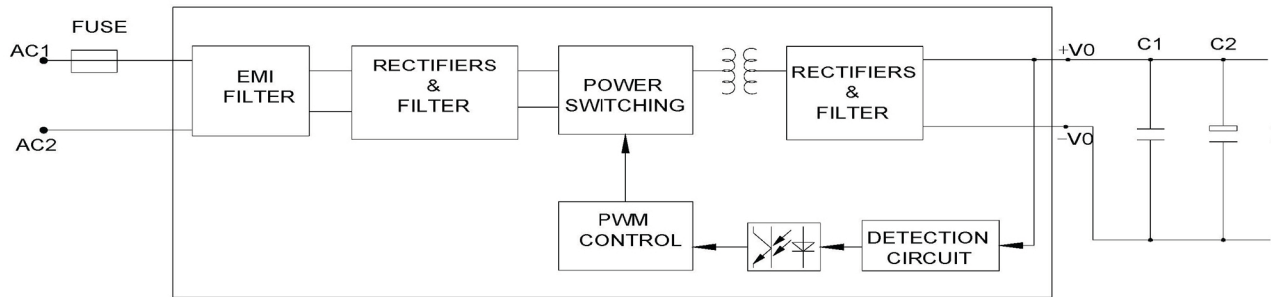

Note:
A fuse is recommended on the input
type: 1A/310V Slow Blow

Note: C1 and C2 are optional



Dimensions:

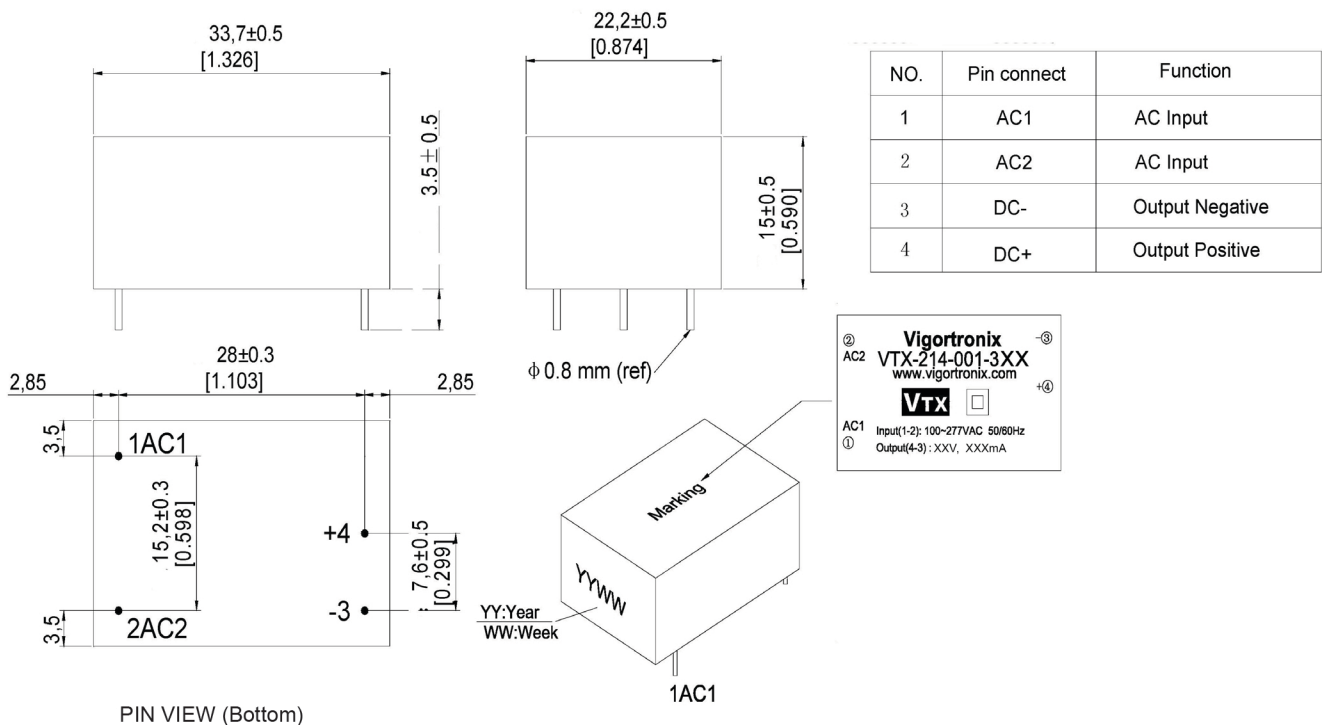

PIN VIEW (Bottom)

Derating Graph:

Unit weight: 20g

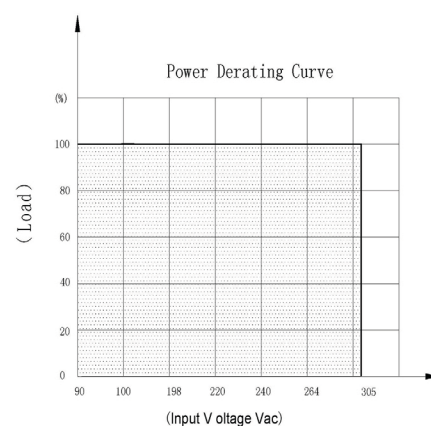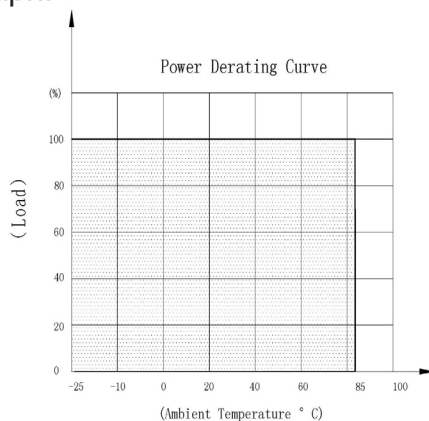

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK

Tel. +44 (0)1993 777570 Fax. +44 (0)1993 777580 Web. www.vigortronix.com E-mail: sales@vigortronix.com

Vigortronix is a trading name of Vigortronix (UK) Limited

Vigortronix.com