




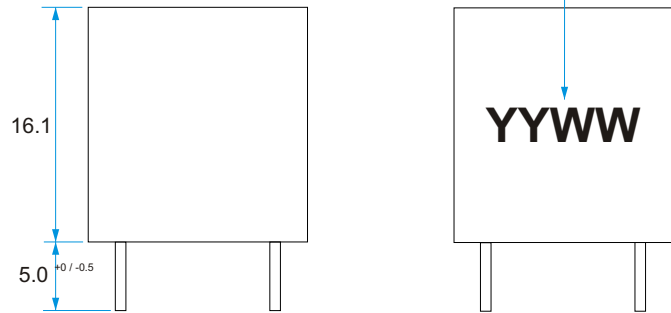



Marking:
White ink printed on to top of box
or black print on self adhesive label

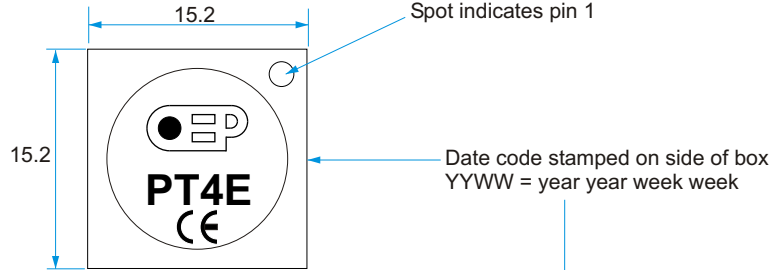

Pin diameter: 0.7mm
Tolerance on all dimensions: +/- 0.2mm unless stated otherwise

Materials:

- Bobbin: FR530
UL file number E41938M
- Potting box: Material: FR530
UL file no. E41938(M)
- Resin: 2-part epoxy resin type 3300A and 3300B
UL file number E218090
- Winding wire: Enamel coated copper wire
UL file no. E164502
- Polyester tape: JingJiang Yahua
UL file: E165111 or JY25-A1
UL file number E246950
or equivalent

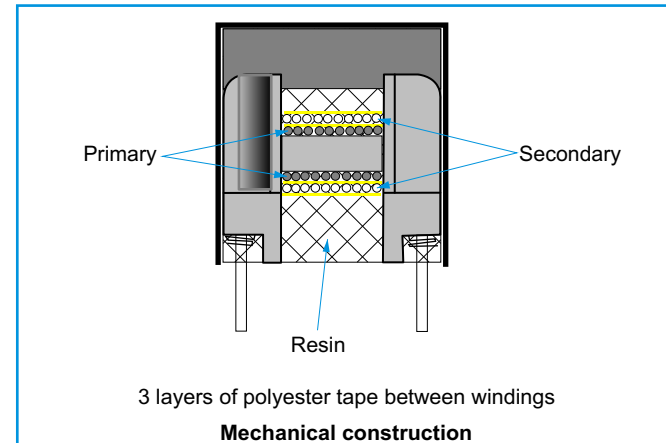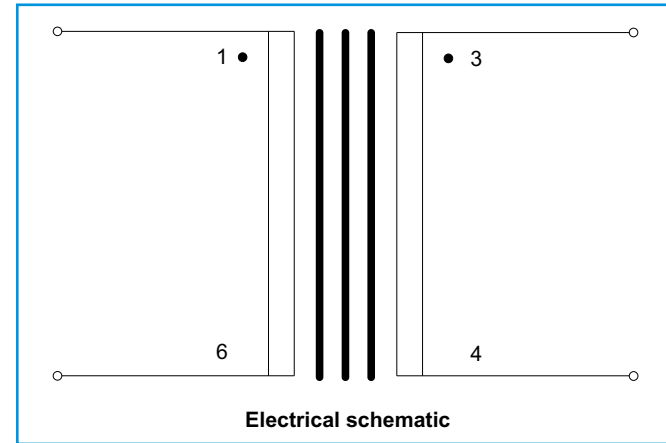

Electrical specification:

- Turns ratio: 1:1
- Primary inductance: 3mH min. @ 1kHz, 0.27V (series equivalent circuit)
- Primary DC resistance: 0.76 +/- 10%
- Secondary DC resistance: 1.01 +/- 10%
- Interwinding capacitance: 20pF (nom.)
- Primary leakage inductance: 19uH (nom.)
- Proof voltage (primary to secondary): 2kV rms
- Voltage - Time product: 200VuS
- Max. pulse current: 200mA (peak)
- Bandwidth: 3kHz - 1MHz

Operating temperature range: -40°C to +70°C
Storage temperature range: -40°C to +125°C



Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for PT4E	1	08/04/04	CS		PT4E
	5	05/09/08	CS		
	6	18/10/13	CS		
	7	10/04/14	CS		

Scale: 2 to 1

All dimensions in mm unless stated otherwise

