
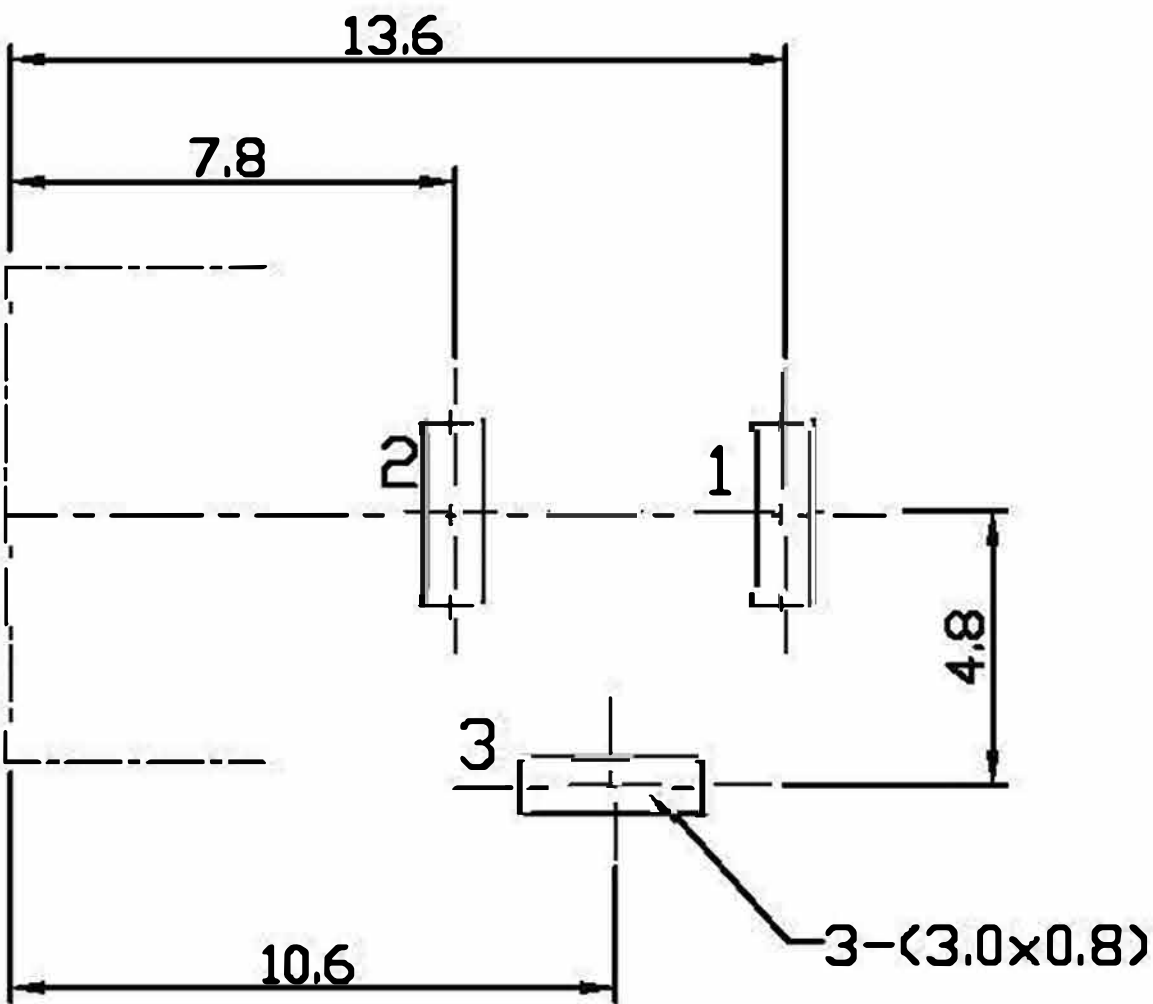
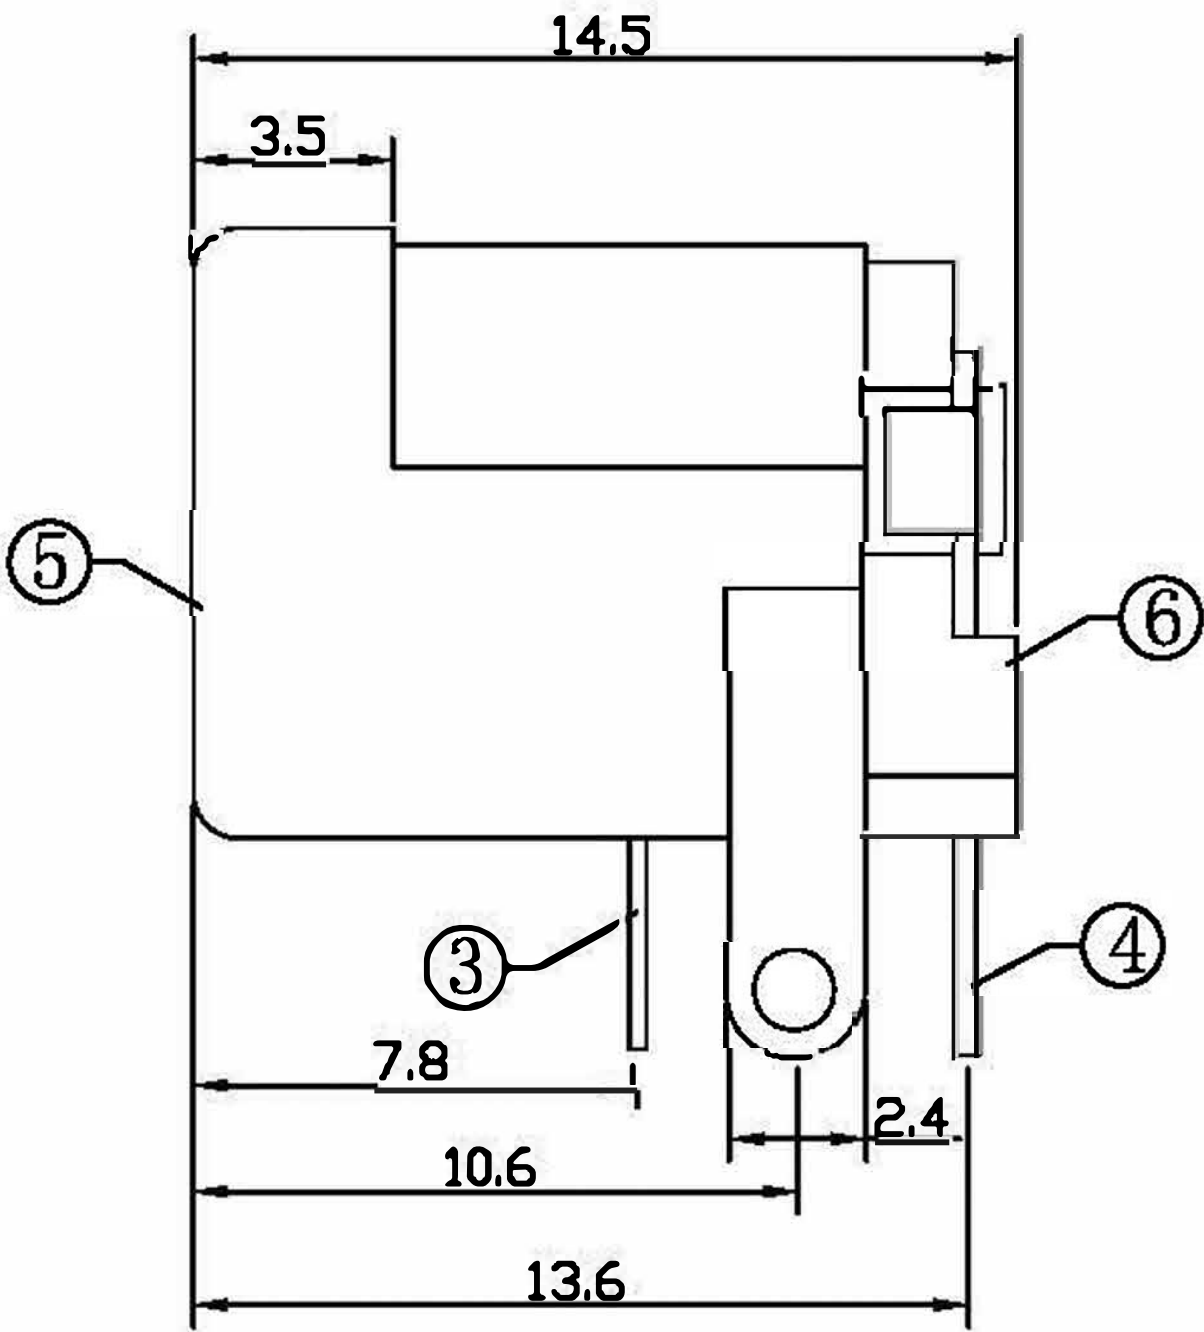


| * REVISIONS |             |      |         |          |
|-------------|-------------|------|---------|----------|
| LTR         | DESCRIPTION | DATE | REVISED | APPROVED |
|             |             |      |         |          |

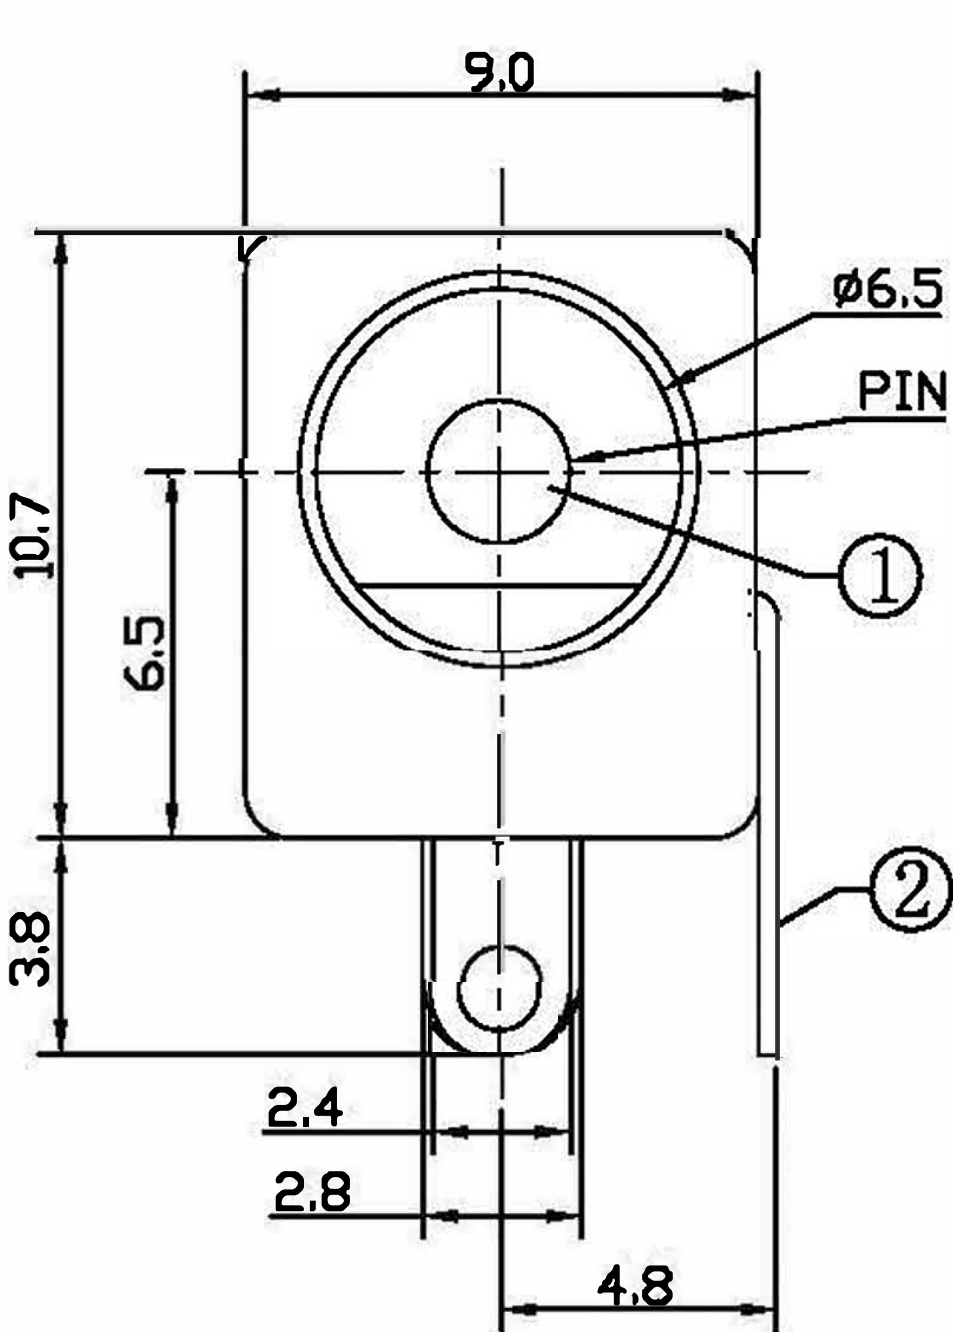

T:1.6 Dimensions of PC board holes  
Tolerance :  $\pm 0.05$ (Printed-top view)

| CAT. NO. | PIN        | SCHEMATIC |
|----------|------------|-----------|
| K375A    | $\phi 2.0$ |           |

### LEAD FREE

|      |             |      |                   |                      |                       |
|------|-------------|------|-------------------|----------------------|-----------------------|
| 6    | COVER       | 1    | PBT 4815          | UL-94V0(BLACK)       |                       |
| 5    | HOUSING     | 1    | PBT 4815          | UL-94V0(BLACK)       |                       |
| 4    | FLAT PIECE  | 1    | C2680 t=0.4       | Sn PLATED            |                       |
| 3    | SPRING      | 1    | C5191 t=0.3       | Sn PLATED            |                       |
| 2    | CURVE PIECE | 1    | C2680 t=0.4       | Sn PLATED            |                       |
| 1    | PIN         | 1    | H59(COPPER ALLOY) | Ni PLATED            |                       |
| LTR  | PART NAME   |      | QTY               | MATERIAL             | REMARK                |
| DWN  | JON         | DATE | 2013.05.31        | 3RD ANGLE PROJECTION | NAME DC POWER JACK    |
| CHKD | JON         | DATE | 2013.05.31        |                      | CAT. NO. K375A        |
| APVD | ELVIS       | DATE | 2013.05.31        | UNIT: mm             | DWN.NO. BJ-020-04 001 |
| 7777 |             |      |                   |                      |                       |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$