


Mini Relay Card Single or Dual

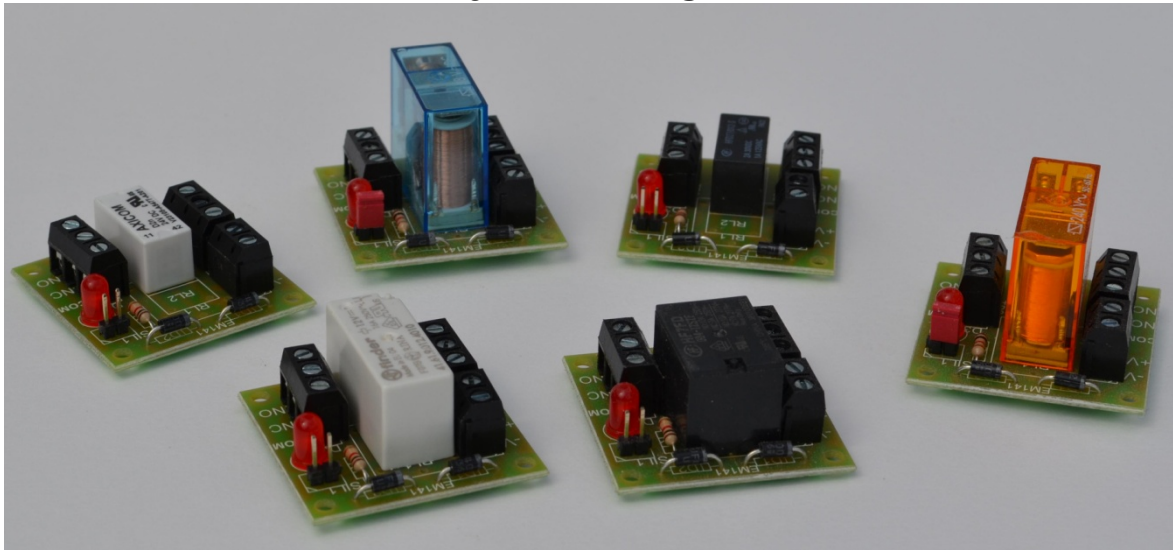

A range of small relay cards 45 x 45mm. Each card has EMF protection and some can be latched by using the link supplied. There is a range of voltages to choose from depending on your requirements, also a range of contact arrangements and current ratings. The relays contacts are dry and either 2x Changeover or single changeover. The latching part of the circuit works from the second set of changeover contacts, therefore requires a positive +V (this must be the same voltage as the Relay voltage) to the COM.

If you are using both sets of contacts and do not want the latch facility remove or don't fit the RED link.

Part No	No of Relays	Contact Type	Coil Voltage	Min Coil Voltage	Max Coil Voltage	Coil Resistance	Contact Rating	Latching or Not
EM132	1	DPCO	5v	3.75v	8.0v	90Ω	2 Amp	Latching
EM132-1	1	SPDT	5v	3.75v	6.5v	70Ω	10 Amp	No
EM132-2	1	SPDT	6v	4.5v	7.8v	100Ω	10 Amp	No
EM133	2	DPCO	5v	3.75v	8.0v	90Ω	2 Amp	Both Latching
EM133-1	2	SPDT	5v	3.75v	6.5v	70Ω	10 Amp	No
EM133-2	2	SPDT	6v	4.5v	7.8v	100Ω	10 Amp	No
EM134	1	DPCO	12v	9.0v	18.5v	450Ω	2 Amp	Latching
EM134-1	1	SPDT	12v	9.0v	15.6v	400Ω	10 Amp	No
EM135	2	DPCO	12v	9.0v	15.6v	400Ω	2 Amp	Both Latching
EM135-1	2	SPDT	12v	9.0v	15.6v	400Ω	10 Amp	No
EM136	1	DPCO	24v	18.0v	35.5v	1600Ω	2 Amp	Latching
EM136-1	1	SPDT	24v	18.0v	31.2v	1600Ω	10 Amp	No
EM137	2	DPCO	24v	18.0v	35.5v	1600Ω	2 Amp	Both Latching
EM137-1	2	SPDT	24v	18.0v	31.2v	1600Ω	10 Amp	No

Some uses

Switching high current/voltage equipment from a low voltage switch

JPR Electronics Ltd

Unit 4, Circle Business Centre, Blackburn Road, Dunstable, Bedfordshire. LU5 5DD.

t: +44(0)1582 47 00 00 f: +44(0)1582 47 00 01

e: sales@jprelec.co.uk w: jprelec.co.uk