

XTREME SERIES - FLAME RETARDANT

XR-7.5FR (12V7.5AH/26W)

Specification

Nominal Voltage	12V
Nominal Capacity(10HR)	7.0Ah at 1.80V/cell @25°C/77°F
Watts(15min Rated)	26.0 Watts/cell at 1.67V/cell @25°C/77°F
Dimension	Length 151±2mm (5.95 inches)
	Width 65±1mm (2.56 inches)
	Container Height 93.5±1mm (3.68 inches)
	Total Height (with Terminal) 99±1mm (3.90 inches)
	Approx Weight 2.15 kg (4.74lbs)
Terminal	T2
Container Material	ABS - VO
Rated Capacity	7.00 AH/0.700A (10hr, 1.80V/cell, 25°C/77°F)
	6.752 AH/0.844A (8hr, 1.80V/cell, 25°C/77°F)
	6.35 AH/1.27A (5hr, 1.75V/cell, 25°C/77°F)
	5.88 AH/1.96A (3hr, 1.75V/cell, 25°C/77°F)
	5.54AH/5.54A (1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	98A (5s)
Internal Resistance	Approx 21.0mΩ
Operating Temp. Range	Discharge : -15~50°C (5~122°F)
	Charge : 0~40°C (32~104°F)
	Storage : -15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 2.10A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
	Standby Use No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	Leoch LCP series batteries may be stored for up to 9 months at 25°C(77°F) and then a freshening charge is required.
	For higher temperatures the time interval will be shorter.




Applications

- ◆ UPS (High rate)
- ◆ Emergency power supply
- ◆ Banks & Financial Markets
- ◆ Hospitals & Testing Laboratories
- ◆ Industrial Process Control Facilities
- ◆ Date & Network Operations Centers

Compliant Standards

- ◆ IEC60896-21/22:2004
- ◆ BS 6290 Part 4

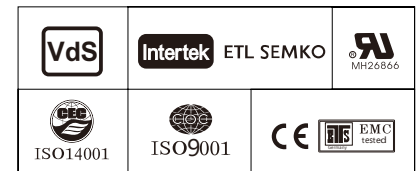

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	25min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	19.0	13.9	11.8	10.3	9.52	8.05	5.74	4.50	3.41	2.56	1.84	1.44	1.19	0.802	0.661
1.80V/cell	20.1	14.8	12.4	10.8	10.0	8.53	6.10	4.77	3.64	2.66	1.91	1.50	1.24	0.844	0.700
1.75V/cell	21.9	15.7	12.9	11.3	10.5	8.99	6.36	4.94	3.79	2.74	1.96	1.53	1.27	0.855	0.707
1.70V/cell	23.6	16.6	13.5	11.8	10.9	9.39	6.62	5.15	3.92	2.85	2.01	1.57	1.30	0.868	0.714
1.67V/cell	25.3	17.4	14.0	12.2	11.4	9.72	6.83	5.33	4.03	2.92	2.05	1.60	1.32	0.880	0.722
1.60V/cell	26.8	18.1	14.6	12.6	11.8	10.0	7.10	5.54	4.14	3.02	2.11	1.65	1.35	0.891	0.728

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	25min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	35.8	26.6	22.8	20.1	18.6	15.9	11.4	9.00	6.84	5.15	3.72	2.92	2.42	1.64	1.35
1.80V/cell	37.5	28.0	23.8	20.8	19.5	16.7	12.1	9.49	7.27	5.32	3.84	3.02	2.51	1.72	1.43
1.75V/cell	40.3	29.4	24.5	21.7	20.3	17.5	12.5	9.80	7.54	5.47	3.92	3.09	2.56	1.74	1.44
1.70V/cell	42.6	30.5	25.3	22.4	20.9	18.1	12.9	10.1	7.77	5.67	4.02	3.15	2.61	1.76	1.46
1.67V/cell	44.9	31.5	26.0	22.9	21.5	18.6	13.3	10.4	7.94	5.79	4.09	3.21	2.66	1.78	1.47
1.60V/cell	46.7	32.2	26.6	23.3	22.1	18.9	13.6	10.8	8.08	5.93	4.18	3.28	2.71	1.80	1.48




Dimensions

T2 Terminal


Unit: mm [inches]

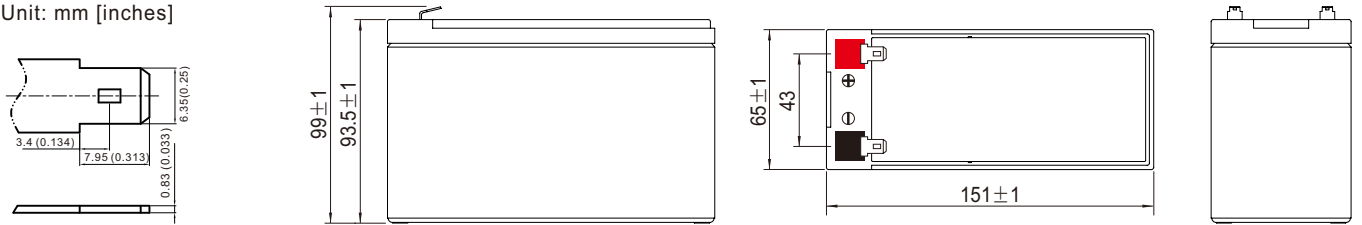


Discharge Characteristics

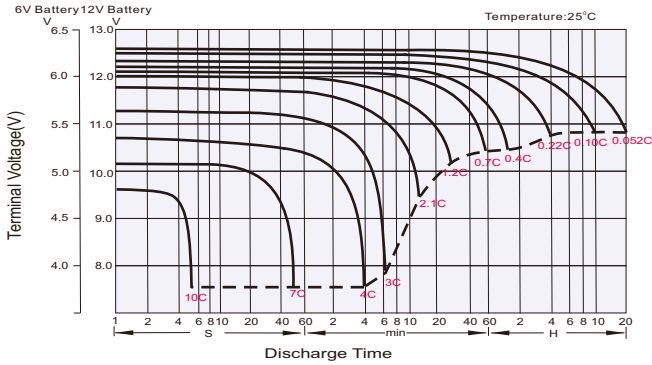



Float Charging Characteristics

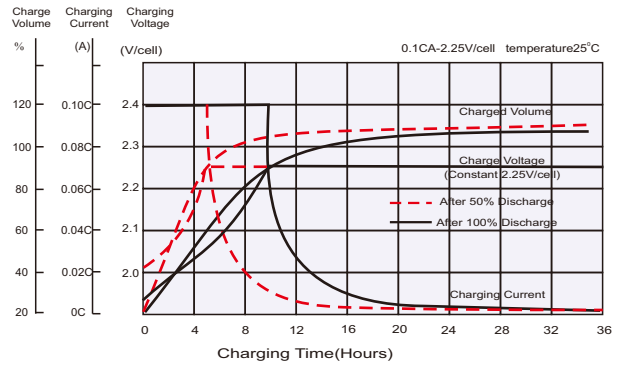

Temperature Effects in Relation to Battery Capacity

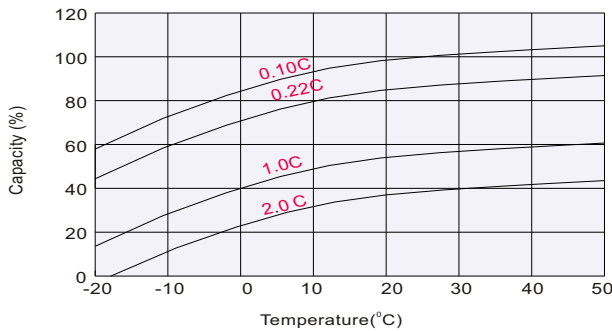

Effect of Temperature on Long Term Float Life

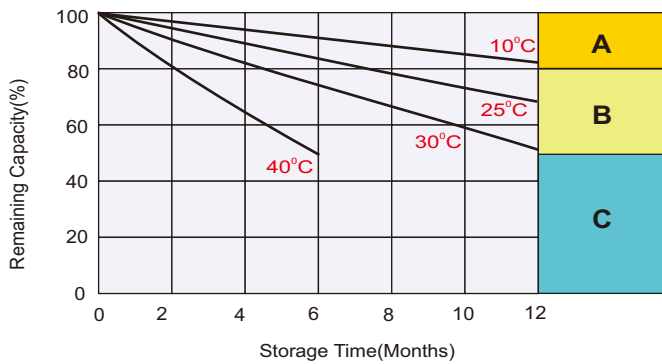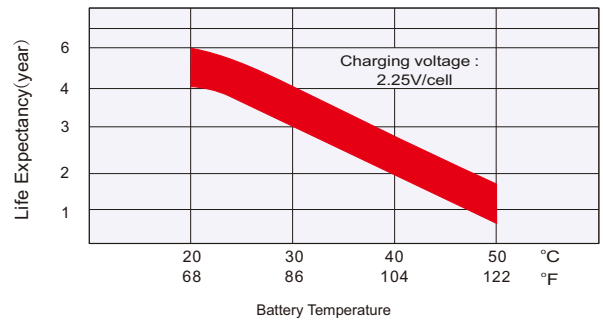

Self Discharge Characteristics

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant volatge 2.25V/cell.
 2. Charged for above 20hours at limited current 0.25CA and constant volatge 2.45V/cell.
 3. Charged for 8~10hours at limited current 0.05CA .
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

China sales office:
 Add: 5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
 Nanshan, Shenzhen, China. 518052
 Tel: +86-755-86036060 (100 lines)
 Fax: +86-755-26067269
 E-mail: export@leoch.com
 Http://www.leoch.com

HongKong sales office:
 Add: Workshop C, 33/F, TML Tower,
 No. 3 Hoi Shing Road, Tsuen Wan,
 New Territories, Hong Kong
 Tel: +852 35786666
 Fax: +852 21170016
 E-mail: sales.hk@leoch.com

Singapore sales office:
 Add: No. 1 Tech Park Crescent,
 Singapore 638131
 Tel: +65 6863 6078(5 lines)
 Fax: +65 6863 6079
 Email sales.sg@Leoch.com

North America sales office:
 Add: 19751 Descartes, Unit A,
 Foothill Ranch, CA 92610, USA
 Tel: 949-588-5853
 Fax: 949-588-5966
 E-mail: sales@leoch.us
 Http://www.leoch.com

Europe sales office:
 Add: 9B Wheatstone Court, Waterwells
 Business Park, Gloucester, GL2-2AQ,
 UK United Kingdom
 Tel: +44(0) 1452 729428 / 1452 729696
 Fax: +44 (0)1452-690125
 E-mail: Sales.Europe@leoch.com