


TB05 SERIES / TB05 系列產品



With clubs-shape movable contact
梅花狀觸點的熱保護器—焊接最牢靠的熱保護器

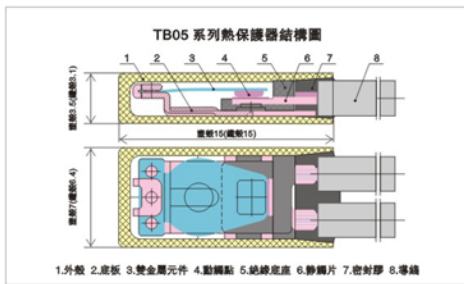

KEY BENEFITS 產品優勢

- Clubs-shape contact, jointing better with spot welding
- Miniature size
- Positive make and break with snap-action disc
- Repeatable temperature performance over life
- Various resistances of bimetal available
- Gasketed case suitable for most impregnation processes
- Substitute SENSATA 7AM 17AM, SEKI ST22 series

- 梅花觸點銀觸點, 焊接更牢靠。
- 體積小, 便于安裝
- 速動型雙金屬片, 反應速度快
- 壽命高達10000次以上
- 雙金屬片有高中低電阻供選擇
- 防真空浸漆浸漆工藝
- 可替代SENSATA 17AM 7AM, 韓國SEK ST-22等國外產品

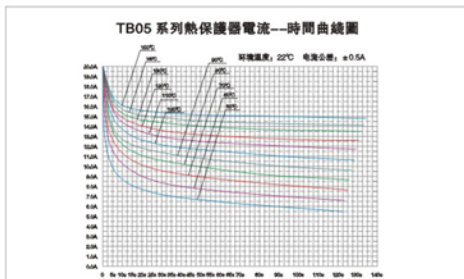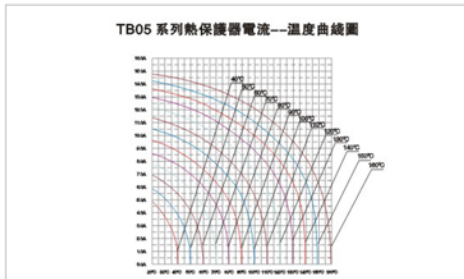

APPLICATION 應用範圍

- HID ballasts
- Battery packs
- Fractional Power Motor
- AC brushless motor and pump
- DC motor
- Heating appliance
- 金浦燈鎮流器
- 充電電池組
- 分馬力電機
- 交流無刷馬達和水泵
- 直流馬達
- 電加熱器具

CERTIFICATIONS 認證

AGENCY	FILE NUMBER	STANDARD NUMBER	APPLICATION
UL	E258703	2111	Motor Protection
VDE	40024884	EN60730-2-3	Lighting ballast
CQC	CQC06002017310	GB14536.1 GB14536.3	Motor Protection Limit and regulating controls
CB	CN8029	IEC60730-1	Motor Protection

MAXIMUM CONTACT RATINGS 觸點最大容量 10000 cycles

VOLTAGE	CURRENT
24 VDC	10 amperes
250 VAC	5 amperes